

LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 70/50

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 70/50

Description

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN70/50




Article information

EAN Code	4038088026168
ETIM Class	EC003025
Nominal diameter	DN 70, DN 50
Nominal length/degree	45
Outside measurements (HxWxL)	102 x 184 x 230 mm
Weight	3,00 Kg (STK)
Product group	3
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

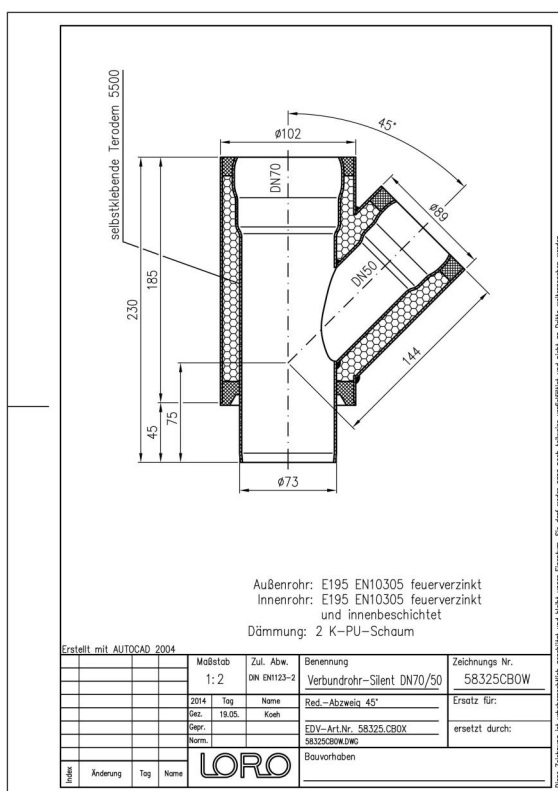

Downloads



Alles online

[Installation \(PDF\)](#)

CAD 2D (DXF)

[CAD drawing \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)