

## LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/70

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 100/70

### Popis

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN100/70




### Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088026182               |
| ETIM trieda               | EC003025                    |
| Menovitý priemer          | DN 100, DN 70               |
| Menovitá dĺžka/stupeň     | 45                          |
| Vonkajšie rozmery (VxŠxH) | 133 x 238 x 300 mm          |
| Hmotnosť                  | 6,70 Kg (STK)               |
| Skupina produktov         | 3                           |
| Colný sadzobník           | 73089098                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

### Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

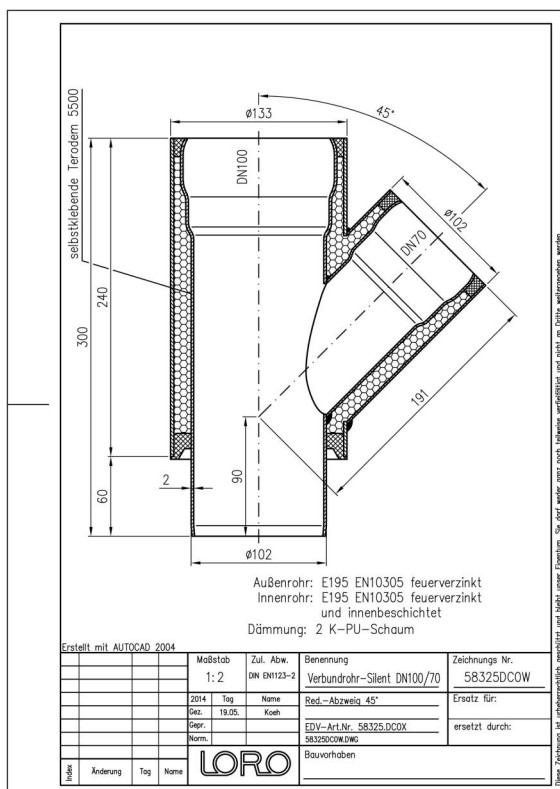

### Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)