
LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/70

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 100/70

Beskrivelse

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN100/70



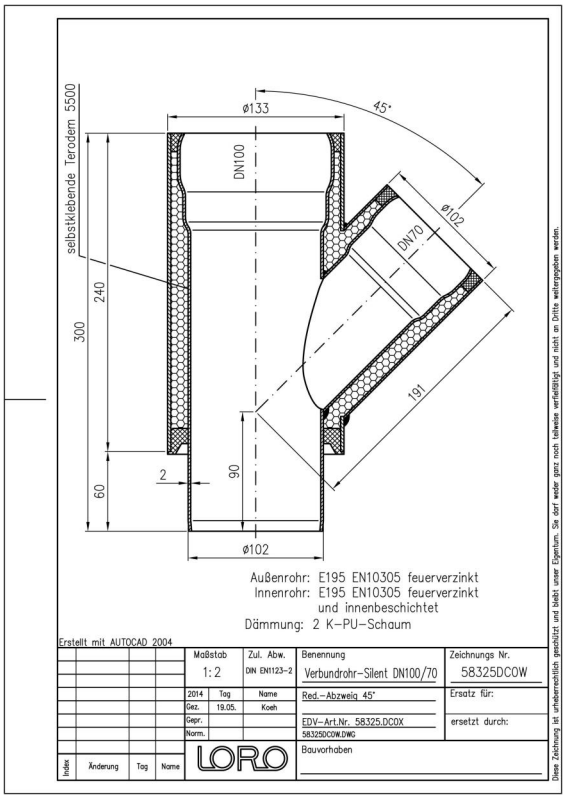

Artikeldata

EAN-kode	**4038088026182**
ETIM Klasse	**EC003025**
Nominel diameter	**DN 100, DN 70**
Nominel længde/grad	**45**
Ydermål (HxBxL)	**133 x 238 x 300 mm**
Vægt	**6,70 Kg (STK)**
Produktgruppe	**3**
Toldtarifnummer	**73089098**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Downloads

Alles online

Installationsvejledning (PDF)
Måltegning (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)