

## LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 100/70

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 100/70

### Beskrivelse

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN100/70




### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088026182               |
| ETIM-klasse           | EC003025                    |
| Nominell diameter     | DN 100, DN 70               |
| Nominell lengde/grad  | 45                          |
| Utvendige mål (HxBxL) | 133 x 238 x 300 mm          |
| Vekt                  | 6,70 Kg (STK)               |
| Produktgruppe         | 3                           |
| Tolltariffnummer      | 73089098                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

### Bruksanvisning

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

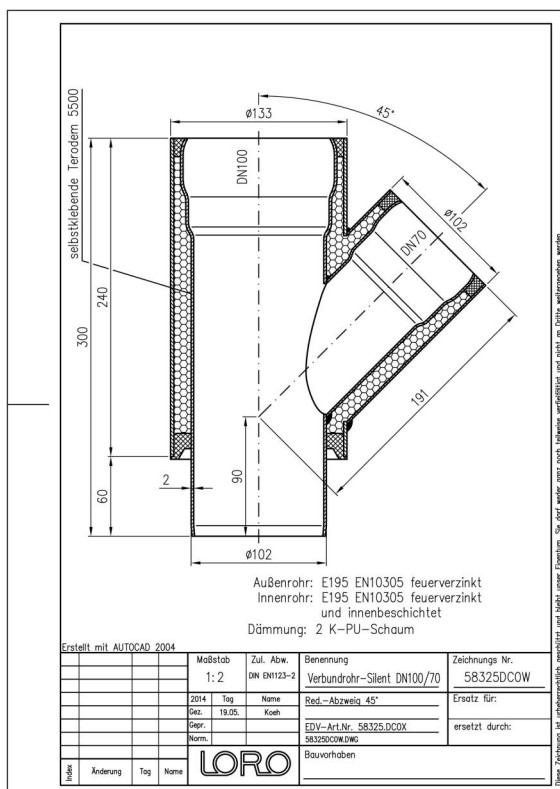

### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)