

## LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 125/100

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 125/100

### Beskrivelse

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN125/100




### Artikeldata

|                        |                             |
|------------------------|-----------------------------|
| EAN-kode               | 4038088026199               |
| ETIM Klasse            | EC003025                    |
| Nominal diameter       | DN 125, DN 100              |
| Nominal<br>længde/grad | 45                          |
| Ydermål (HxBxL)        | 168 x 305 x 365 mm          |
| Vægt                   | 9,00 Kg (STK)               |
| Produktgruppe          | 3                           |
| Toldtarifnummer        | 73089098                    |
| Materiale / Farve      | Stahl feuerverzinkt, Silber |

### Brugsanvisning

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

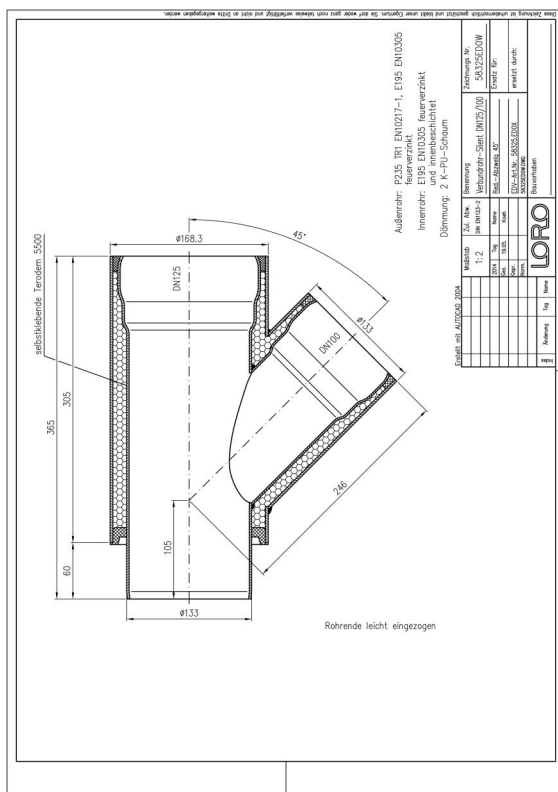

### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltægning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)