LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/100

LORO-Composite Pipe-Red. branches SILENT 45 degrees DN 150/100

Descrizione

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN150/100

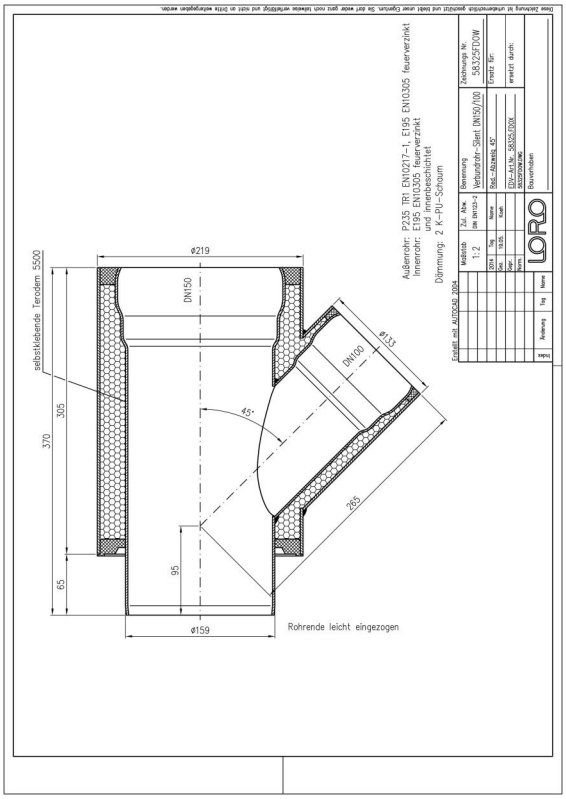

Dati articolo

Codice EAN	**4038088038383**
Classe ETIM	**EC003025**
Diametro nominale	**DN 150, DN 100**
Lunghezza/grado nominale	**45**
Misure esterne (AxLxP)	**219 x 344 x 370 mm**
Peso	**15,00 Kg (STK)**
Gruppo prodotti	**3**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Download

Alles online

Istruzioni di installazione (PDF)
CAD 2D (DXF)
Disegno dimensionale (PDF)
CAD (DWG)
Brochure (PDF)