

## LORO-X SILENT COMPOSITE REDUCED BRANCH 45 DEGREE DN 150/125

LORO multilayer pipe red. branches SILENT 45 degrees DN 150/125

### Leírás

LORO-X compound pipe reducing branch, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN150/125




### Cikkadatok

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088038390               |
| ETIM osztály           | EC003025                    |
| Névleges átmérő        | DN 150, DN 125              |
| Névleges hossz/fok     | 45                          |
| Külső méretek (MxSzxH) | 219 x 385 x 420 mm          |
| Súly                   | 15,00 Kg (STK)              |
| Termékcsoport          | 3                           |
| Vámtarifaszám          | 73089098                    |
| Anyag / Szín           | Stahl feuerverzinkt, Silber |

### Használati megjegyzés

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

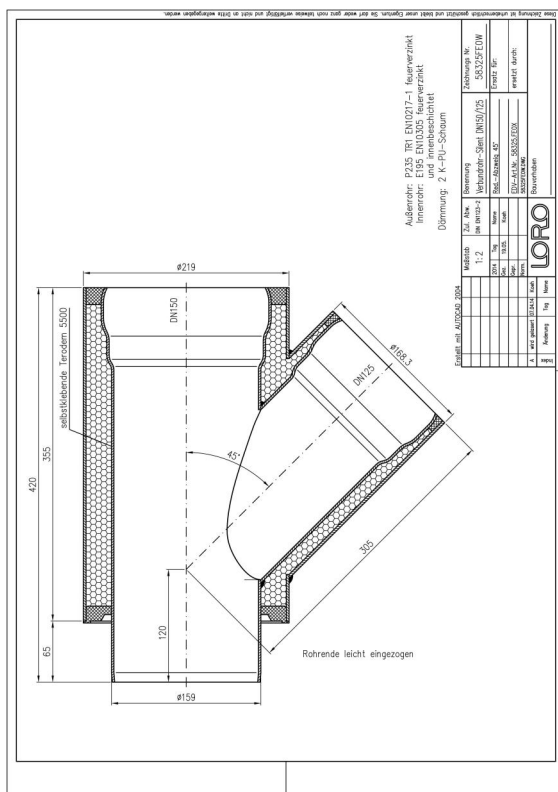

### Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Méterrajz \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospektus \(PDF\)](#)