

LORO-VERBUNDROHR-BOGEN SILENT 87 GR.

LORO-Composite Pipe Bend SILENT 87 degrees DN 32

Tekst przetargowy

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN32




Dane artykułu

Kod EAN	4038088094495
Klasa ETIM	EC003024
Średnica nominalna	DN 32
Długość/stożek nominalny	87
Wymiary zewnętrzne (WxSxD)	89 x 142 x 149 mm
Waga	1,10 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

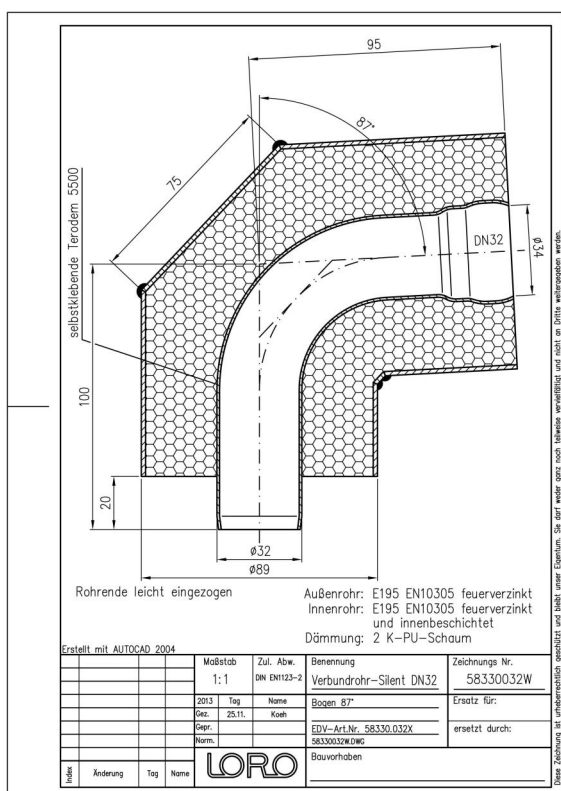

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Rysunek wymiarowy \(PDF\)](#)
[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)
[BIM IFC4 \(parametryczny\)](#)