

## LORO-X SILENT COMPOSITE BEND 87 DEGREE DN 150

LORO-Composite pipe bend SILENT 87 degrees DN 150

### Descrizione

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 87 degrees, DN150




### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088026243               |
| Classe ETIM              | EC003024                    |
| Diametro nominale        | DN 150                      |
| Lunghezza/grado nominale | 87                          |
| Misure esterne (AxLxP)   | 219 x 328 x 341 mm          |
| Peso                     | 11,50 Kg (STK)              |
| Gruppo prodotti          | 3                           |
| Numero tariffa doganale  | 73089098                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

### Note d'uso

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

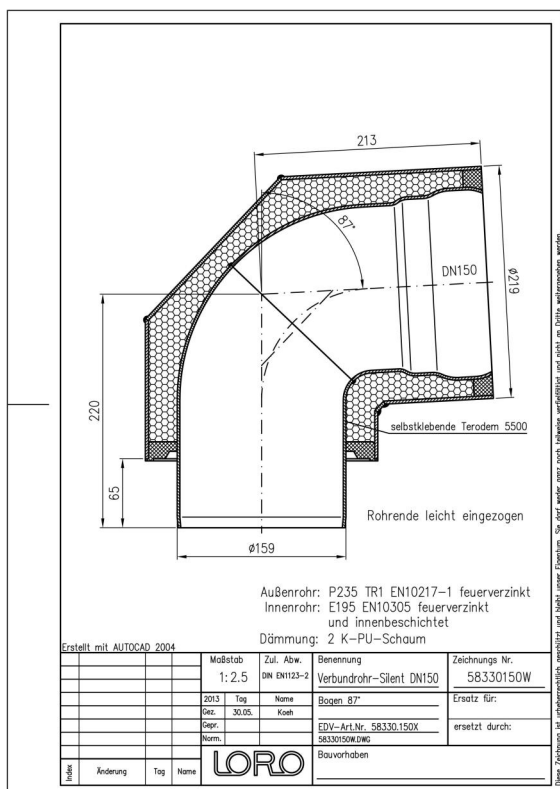

### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametric\)](#)