

LORO-X SILENT COMPOSITE BEND 70 DEGREE DN 50

LORO-Composite pipe bend SILENT 70 degrees DN 50

Beskrivning

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 70 degrees, DN50




Artikeldata

EAN-kod	4038088026250
ETIM-klass	EC003024
Nominell diameter	DN 50
Nominell längd/grad	70
Yttermått (HxBxL)	89 x 189 x 217 mm
Vikt	1,60 Kg (STK)
Produktgrupp	3
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

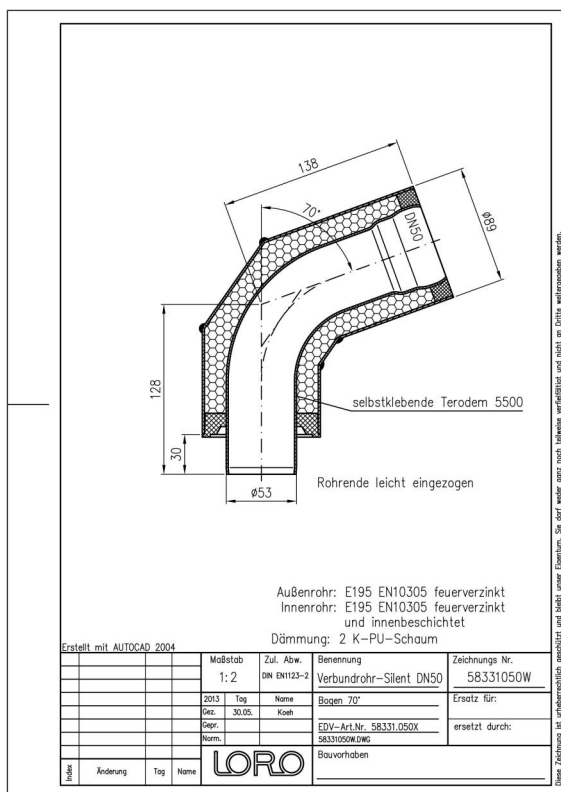

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

CAD 2D (DXF)

[Mått ritning \(PDF\)](#)

CAD (DWG)

[Broschyr \(PDF\)](#)

BIM IFC4 (parametrisch)