


## LORO-X SILENT COMPOSITE BEND 70 DEGREE DN 100

LORO-Composite pipe bend SILENT 70 degrees DN 100

### Descrizione

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 70 degrees, DN100

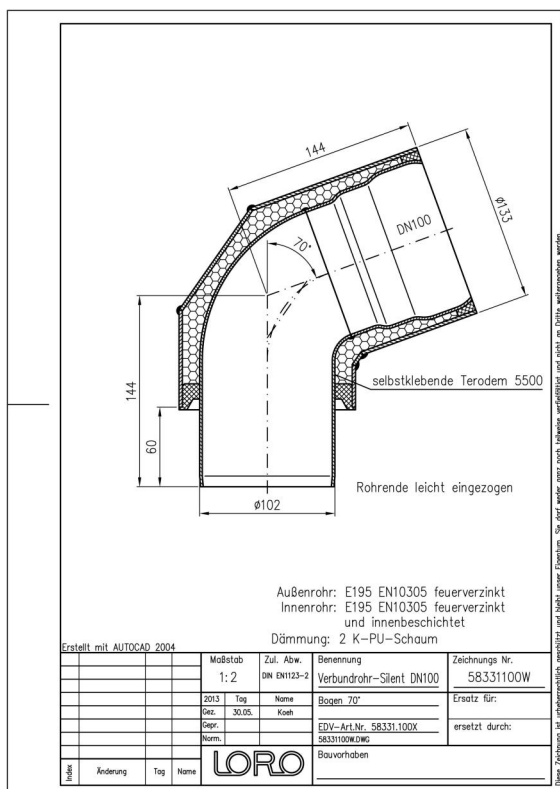

### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088026274               |
| Classe ETIM              | EC003024                    |
| Diametro nominale        | DN 100                      |
| Lunghezza/grado nominale | 70                          |
| Misure esterne (AxLxP)   | 133 x 225 x 256 mm          |
| Peso                     | 3,90 Kg (STK)               |
| Gruppo prodotti          | 3                           |
| Numero tariffa doganale  | 73089098                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

### Note d'uso

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)  
[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)  
[BIM IFC4 \(parametrico\)](#)