


## LORO-X SILENT COMPOSITE BEND 70 DEGREE DN 125

## LORO-Composite pipe bend SILENT 70 degrees DN 125

## Beschrijving

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 70 degrees, DN125

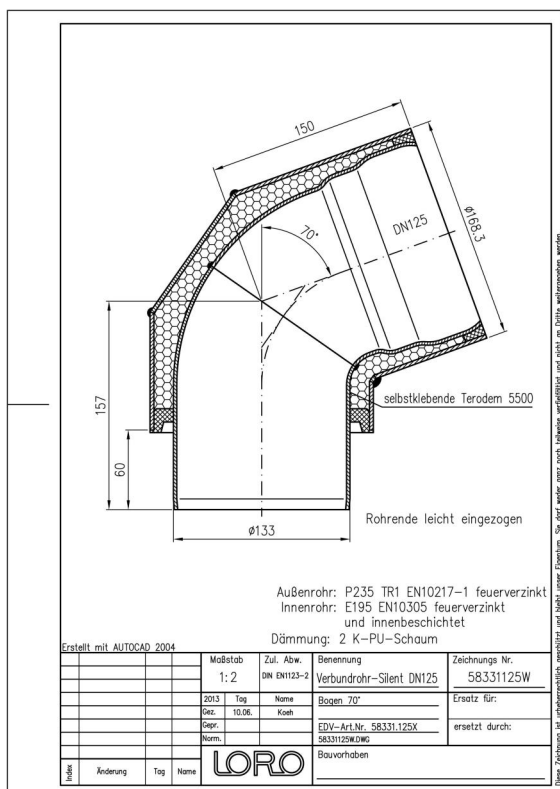

## Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088026281               |
| ETIM Klasse              | EC003024                    |
| Nominale diameter        | DN 125                      |
| Nominale lengte/graad    | 70                          |
| Buitenafmetingen (HxBxL) | 168 x 254 x 287 mm          |
| Gewicht                  | 8,40 Kg (STK)               |
| Productgroep             | 3                           |
| Douanetariefnummer       | 73089098                    |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

## Gebruiksaanwijzing

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus:Innenrohr mit Schallschutzfolie,PU-  
Dämmschicht, Baustoffklasse B2, FCKW-  
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X  
Stahlabflussrohr) Achtung: Sonderanfertigung - keine  
Lagerware.

## Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

CAD 2D (DXF)

[Maattekening \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)

BIM IFC4 (parametrisch)