

## LORO-X SILENT COMPOSITE BEND 45 DEGREE DN 50

LORO-Composite pipe bend SILENT 45 degrees DN 50

### Opis

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN50




### Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088026304               |
| ETIM klasa              | EC003024                    |
| Nazivni promjer         | DN 50                       |
| Nazivna duljina/stupanj | 45                          |
| Vanjske mjere (VxŠxD)   | 89 x 157 x 216 mm           |
| Težina                  | 1,30 Kg (STK)               |
| Grupa proizvoda         | 3                           |
| Carinski tarifni broj   | 73089098                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

### Napomena za upotrebu

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

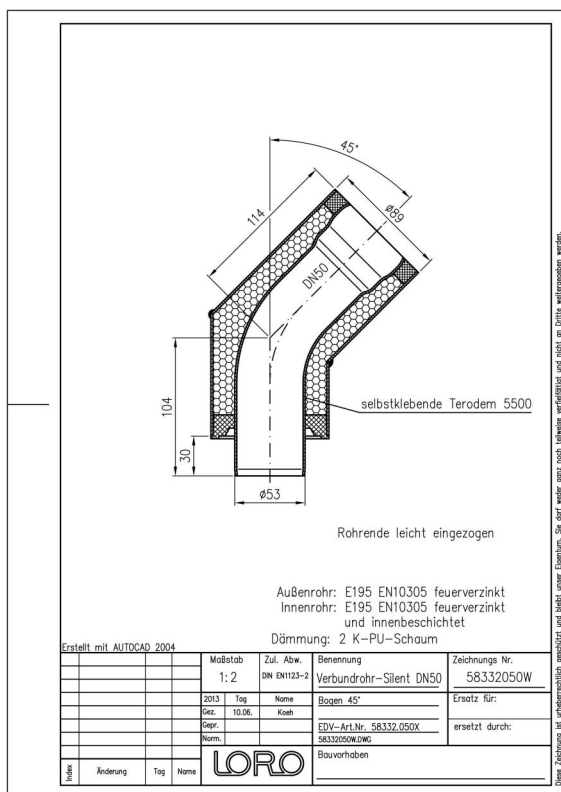

### Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Dimenzijski crtež \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)  
[BIM IFC4 \(parametrisch\)](#)