

## LORO-X SILENT COMPOSITE BEND 45 DEGREE DN 100

LORO-Composite pipe bend SILENT 45 degrees DN 100

### Opis

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 45 degrees, DN100




### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088026328               |
| Klasa ETIM                 | EC003024                    |
| Średnica nominalna         | DN 100                      |
| Długość/stożek nominalny   | 45                          |
| Wymiary zewnętrzne (WxSxD) | 133 x 201 x 259 mm          |
| Waga                       | 3,40 Kg (STK)               |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73089098                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

### Wskazówki dotyczące użytkowania

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

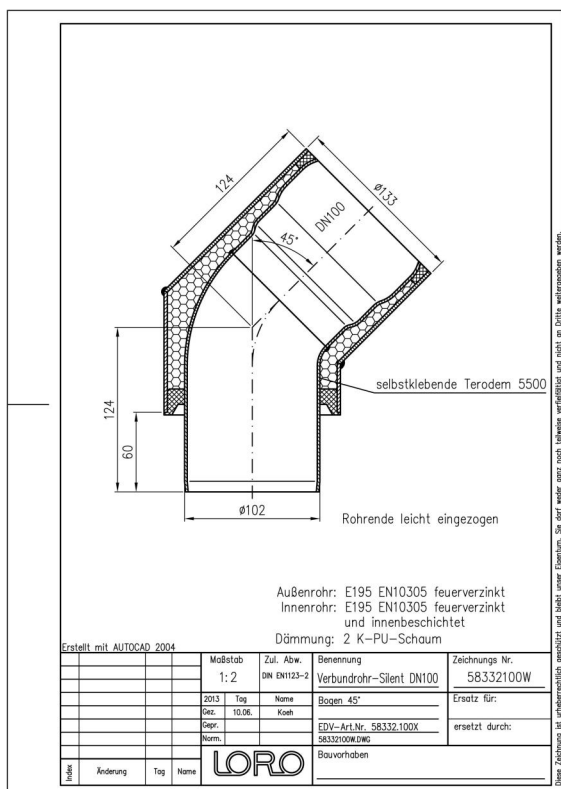

### Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Rysunek wymiarowy \(PDF\)](#)  
[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)  
[BIM IFC4 \(parametryczny\)](#)