

LORO-X SILENT COMPOSITE BEND 30 DEGREE DN 50

LORO-Composite pipe bend SILENT 30 degrees DN 50

Beskrivelse

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 30 degrees, DN50




Artikkeldata

EAN-kode	4038088026359
ETIM-klasse	EC003024
Nominell diameter	DN 50
Nominell lengde/grad	30
Utvendige mål (HxBxL)	89 x 134 x 203 mm
Vekt	1,10 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus: Innenrohr mit Schallschutzfolie, PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

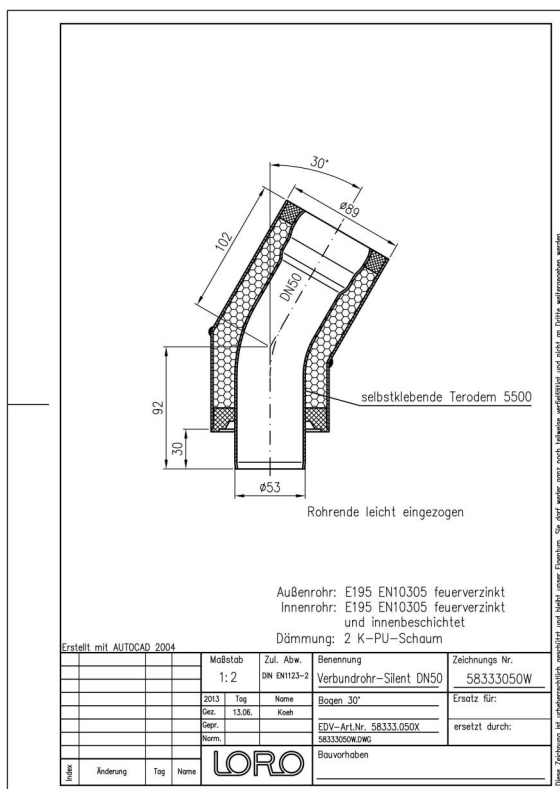

Nedlasteringer



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brosjyre \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)