


LORO-X SILENT COMPOSITE BEND 30 DEGREE DN 125

LORO-Composite pipe bend SILENT 30 degrees DN 125

Opis

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 30 degrees, DN125

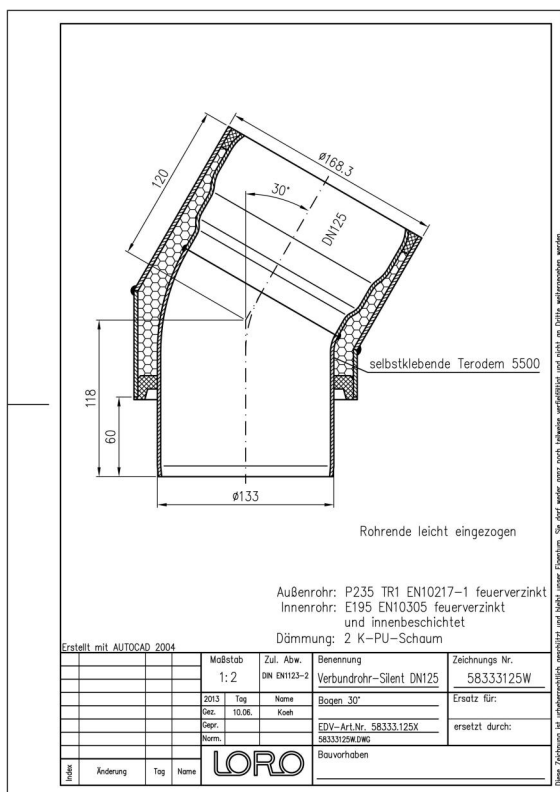

Podatki o izdelku

EAN koda	4038088026380
ETIM razred	EC003024
Nazivni premer	DN 125
Nazivna dolžina/stopinja	30
Zunanje mere (VxŠxD)	168 x 217 x 264 mm
Teža	4,50 Kg (STK)
Skupina izdelkov	3
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)