

## LORO-X SILENT COMPOSITE BEND 15 DEGREE DN 50

### LORO-Composite pipe bend SILENT 15 degrees DN 50

#### Beskrivning

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 15 degrees, DN50




#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088026403               |
| ETIM-klass          | EC003024                    |
| Nominell diameter   | DN 50                       |
| Nominell längd/grad | 15                          |
| Yttermått (HxBxL)   | 89 x 111 x 180 mm           |
| Vikt                | 1,00 Kg (STK)               |
| Produktgrupp        | 3                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

#### Användningsanvisning

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

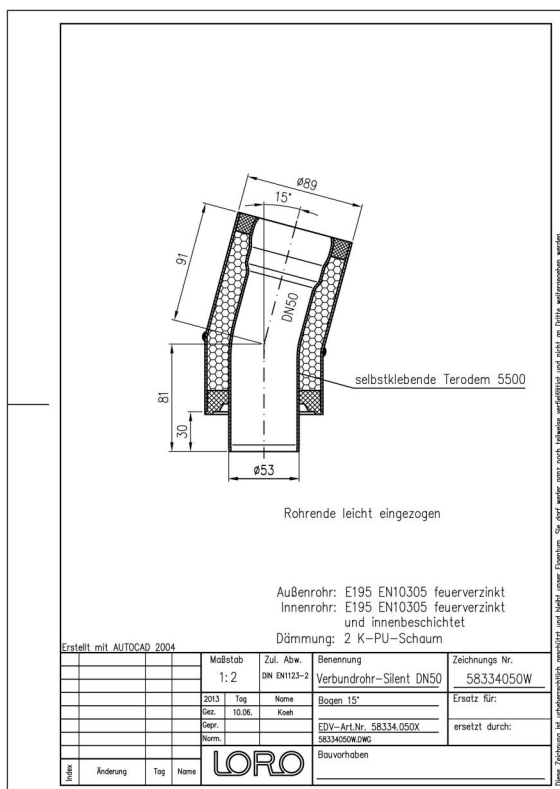

#### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måttitning \(PDF\)](#)

[CAD \(DWG\)](#)

[Broschyr \(PDF\)](#)

[BIM IFC4 \(parametrisk\)](#)