
LORO-X SILENT COMPOSITE BEND 15 DEGREE DN 50

LORO-Composite pipe bend SILENT 15 degrees DN 50

Descripción

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 15 degrees, DN50



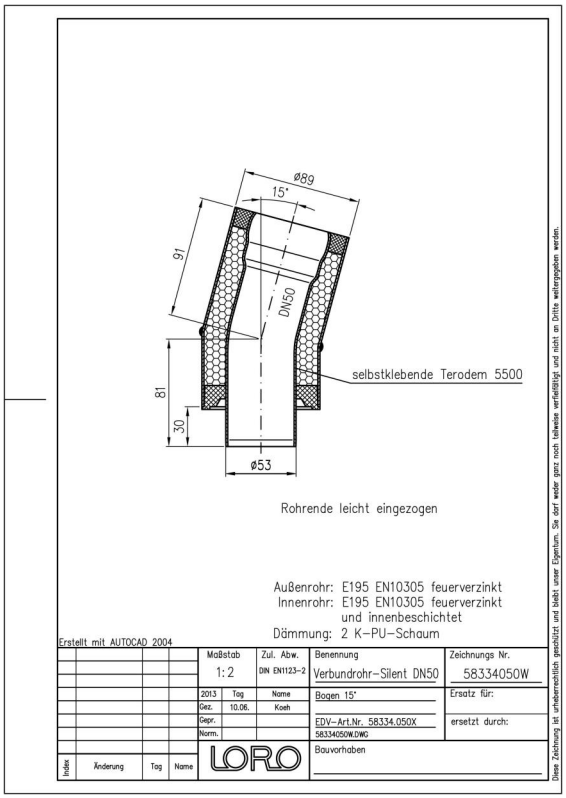

Datos del artículo

Código EAN	**4038088026403**
Clase ETIM	**EC003024**
Diámetro nominal	**DN 50**
Longitud/grado nominal	**15**
Medidas exteriores (AxAxL)	**89 x 111 x 180 mm**
Peso	**1,00 Kg (STK)**
Grupo de productos	**3**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Descargas

Alles online

Instrucciones de instalación (PDF)
Dibujo dimensional (PDF)
Folleto (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)