


LORO-X SILENT COMPOSITE BEND 15 DEGREE DN 70

LORO-Composite pipe bend SILENT 15 degrees DN 70

Popis

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 15 degrees, DN70

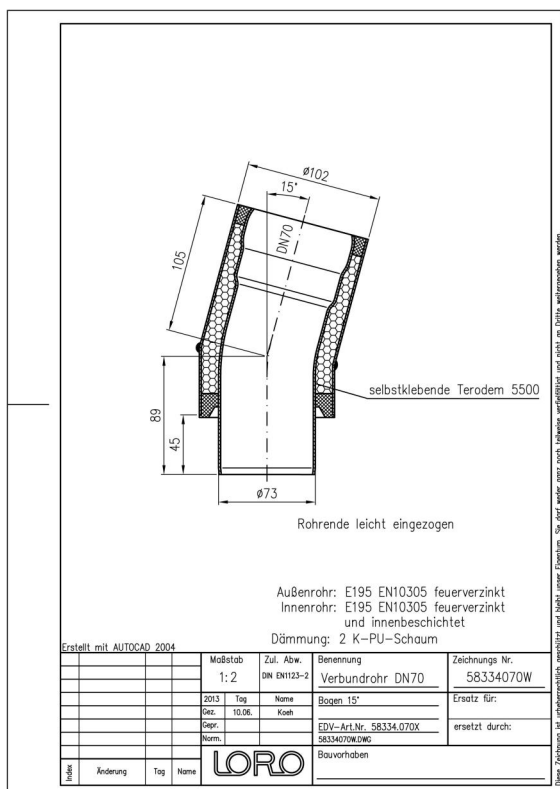

Údaje o artikli

EAN kód	4038088026410
ETIM trieda	EC003024
Menovitý priemer	DN 70
Menovitá dĺžka/stupeň	15
Vonkajšie rozmery (VxŠxH)	102 x 127 x 204 mm
Hmotnosť	1,60 Kg (STK)
Skupina produktov	3
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

CAD 2D (DXF)

[Rozmerový výkres \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

BIM IFC4 (parametrisch)