

LORO-X SILENT COMPOSITE BEND 15 DEGREE DN 70

LORO-Composite pipe bend SILENT 15 degrees DN 70

Descripción

LORO-X compound pipe bend, SILENT version, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound insulation mat (attached to inner pipe) insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized) 15 degrees, DN70




Datos del artículo

Código EAN	4038088026410
Clase ETIM	EC003024
Diámetro nominal	DN 70
Longitud/grado nominal	15
Medidas exteriores (AxAxL)	102 x 127 x 204 mm
Peso	1,60 Kg (STK)
Grupo de productos	3
Número de arancel aduanero	73089098
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

Silent für erhöhte Schallschutzanforderungen
Doppelwandiges Abflussrohr, DN 40 - DN 150
bestehend aus:Innenrohr mit Schallschutzfolie,PU-
Dämmschicht, Baustoffklasse B2, FCKW-
frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X
Stahlabflussrohr) Achtung: Sonderanfertigung - keine
Lagerware.

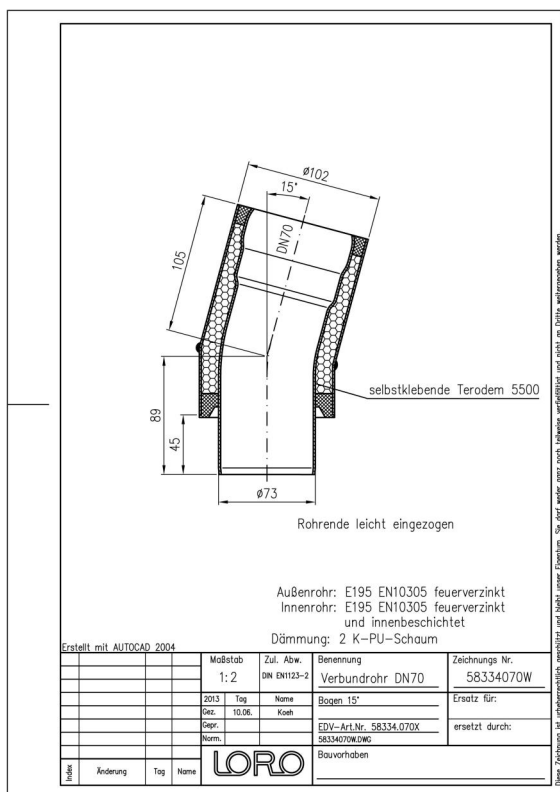

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Dibujo dimensional \(PDF\)](#)
[CAD \(DWG\)](#)

[Folieto \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)