

LORO-X SILENT COMPOUND TRANSITION PIPE CONCENTRIC DN 40/70

LORO-Composite Red. transition pipe SILENT DN 40/70

Text pro výběrové řízení

LORO-X compound pipe transition pipe SILENT, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound-damping mat (attached to inner pipe), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), concentric reducer, DN40/70




Údaje o artiklu

EAN kód	4038088093276
ETIM třída	EC003024
Jmenovitý průměr	DN 40, DN 70
Vnější rozměry (VxŠxD)	102 x 102 x 150 mm
Hmotnost	0,70 Kg (STK)
Skupina produktů	3
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

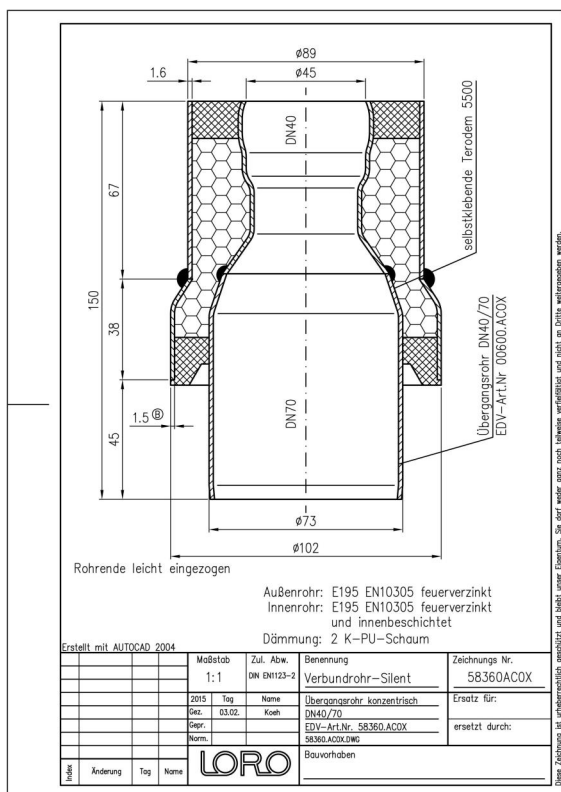

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)