

## LORO-X SILENT COMPOSITE TRANSITION PIPE CONCENTRIC DN 70/100

### LORO-Composite Red. transition pipe SILENT DN 70/100

#### Beskrivelse

LORO-X compound pipe transition pipe SILENT, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound-damping mat (attached to inner pipe), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), concentric reducer, DN70/100




#### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088026489               |
| ETIM-klasse           | EC003024                    |
| Nominell diameter     | DN 70, DN 100               |
| Utvendige mål (HxBxL) | 133 x 133 x 195 mm          |
| Vekt                  | 1,80 Kg (STK)               |
| Produktgruppe         | 3                           |
| Tolltariffnummer      | 73089098                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

#### Bruksanvisning

Silent für erhöhte Schallschutzanforderungen  
Doppelwandiges Abflussrohr, DN 40 - DN 150  
bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

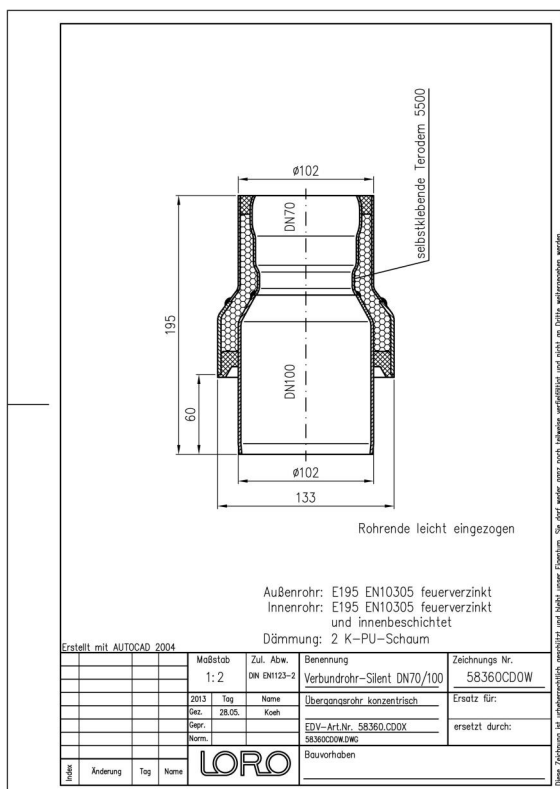

#### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måltegning \(PDF\)](#)
[CAD \(DWG\)](#)
[Brosjyre \(PDF\)](#)