LORO-X SILENT COMPOUND TRANSITION PIPE CONCENTRIC DN 32/40

LORO-Connection Red. transition pipe SILENT DN 32/40

Tekst przetargowy

LORO-X compound pipe transition pipe SILENT, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound-damping mat (attached to inner pipe), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), concentric reducer, DN32/40

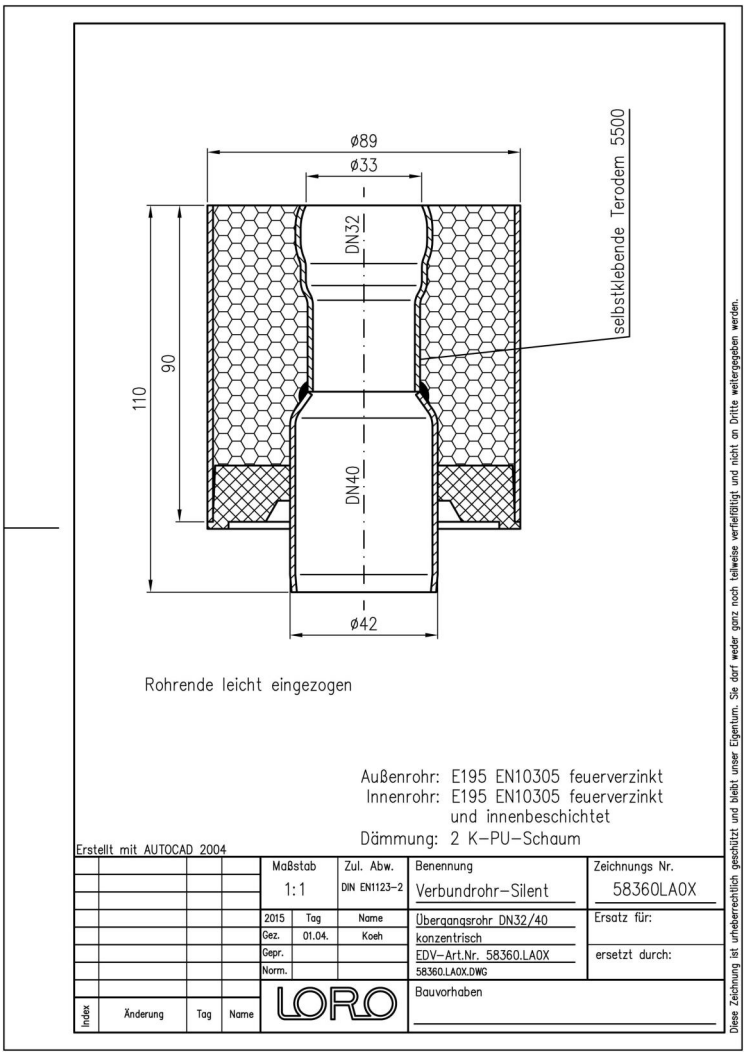

Dane artykułu

Kod EAN	**4038088093252**
Klasa ETIM	**EC003024**
Średnica nominalna	**DN 32, DN 40**
Wymiary zewnętrzne (WxSxD)	**89 x 89 x 110 mm**
Waga	**0,50 Kg (STK)**
Grupa produktów	**3**
Numer taryfy celnej	**73089098**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus:Innenrohr mit Schallschutzfolie,PU-Dämmschicht, Baustoffklasse B2, FCKW-frei,Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Pobieranie

Alles online

Instrukcja montażu (PDF)
CAD 2D (DXF)
Rysunek wymiarowy (PDF)
CAD (DWG)
Broszura (PDF)