


LORO-X SILENT COMPOUND TRANSITION PIPE CONCENTRIC DN 32/50

LORO-Connection Red. transition pipe SILENT DN 32/50

Text pre výberové konanie

LORO-X compound pipe transition pipe SILENT, for increased sound-damping, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), sound-damping mat (attached to inner pipe), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), concentric reducer, DN32/50

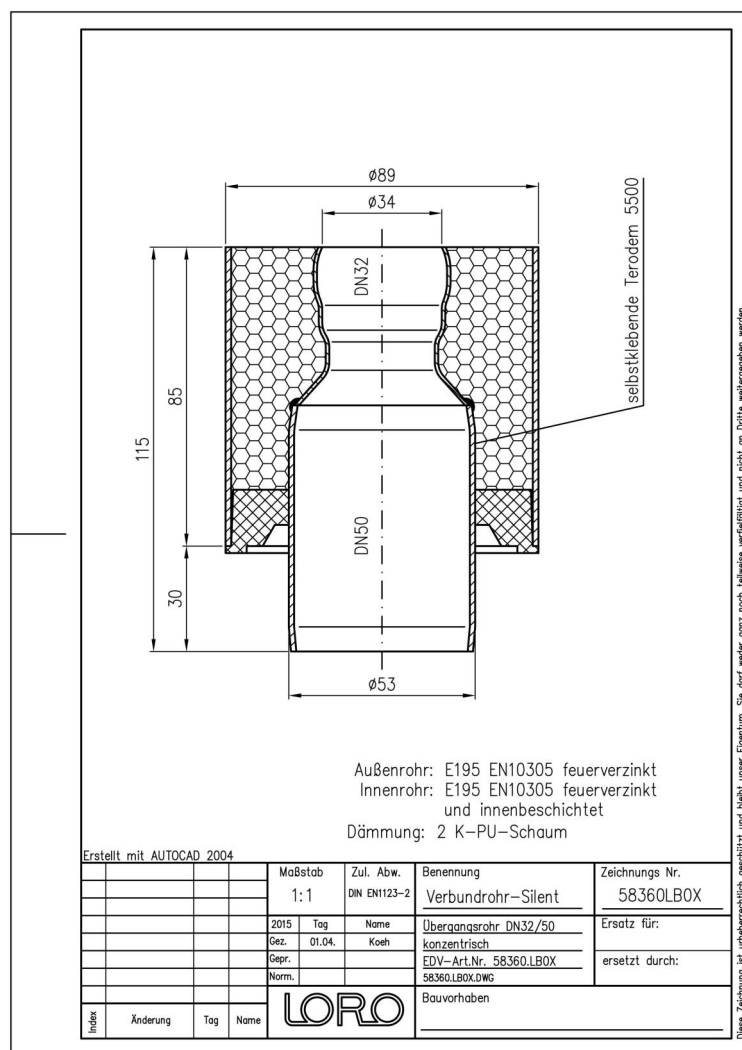

Údaje o artikli

EAN kód 4038088093269

ETIM trieda EC003024

Menovitý priemer DN 32, DN 50

Vonkajšie rozmery (VxŠxH) 89 x 89 x 115 mm

Hmotnosť 0,50 Kg (STK)

Skupina produktov 3

Colný sadzobník 73089098

Materiál / Farba Stahl feuerverzinkt, Silber

Pokyny na použitie

Silent für erhöhte Schallschutzanforderungen Doppelwandiges Abflussrohr, DN 40 - DN 150 bestehend aus: Innenrohr mit Schallschutzfolie, PU-Dämmschicht, Baustoffklasse B2, FCKW-frei, Außenrohr (Innenrohr- und Außenrohr aus LORO-X Stahlabflussrohr) Achtung: Sonderanfertigung - keine Lagerware.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)