

LORO-X COMPOSITE ADJUSTMENT PIECE FOR SIPHONIC FLOW DN 150/125

LORO-Composite pipe adjustment piece DN 150/125

Description

LORO-DRAINJET compound pipe adjustment piece, consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN150/125




Données de l'article

Code EAN	4038088049723
Classe ETIM	EC003024
Diamètre nominal	DN 150, DN 125
Dimensions extérieures (HxLxP)	219 x 219 x 285 mm
Poids	6,40 Kg (STK)
Groupe de produits	3
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

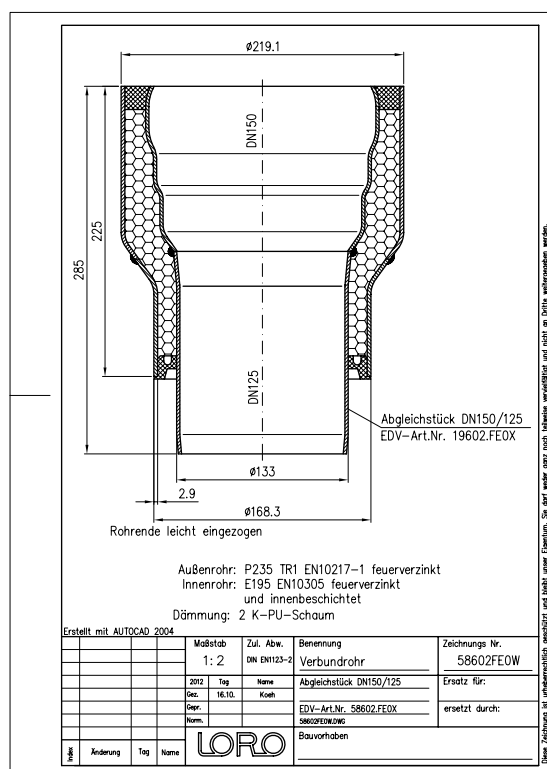

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)