
LORO-X DOUBLE SOCKET DN 50

LORO-X double socket DN 50

Beskrivelse

LORO-X double socket, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50



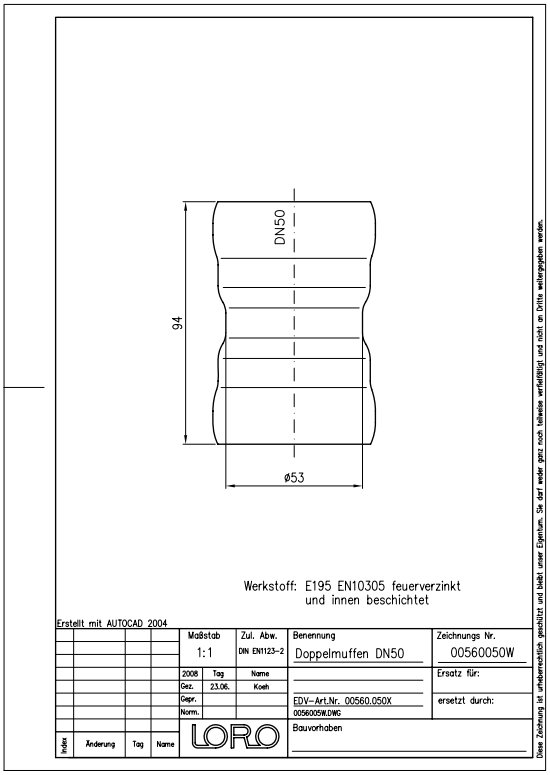

Artikeldata

EAN-kode	**4038088024317**
ETIM Klasse	**EC003024**
Nominel diameter	**DN 50**
Ydermål (HxBxL)	**63 x 63 x 94 mm**
Vægt	**0,20 Kg (STK)**
Produktgruppe	**1**
Toldtarifnummer	**73089098**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

Sollte nach dem Ablängen ein Rohrstück ohne Muffe anfallen, so kann es durch die LORO-X Doppelmuffe wieder zu einem Muffenrohr ergänzt werden. Die Doppelmuffe sollte auf das Restrohr mit dem LORO-X Dichtelement und dem LORO-X Kleber aufgeklebt werden. (In frostgefährdeten Bereichen sind gegen die Fließrichtung gerichtete Muffen, auch Doppelmuffen, nicht zulässig)

Downloads

Alles online

Installationsvejledning (PDF)
Certifikat (PDF)
Måltegning (PDF)
CAD 2D (DXF)
Brochure (PDF)
CAD (DWG)