LORO-X TRANSITION PIPE ECCENTRIC DN 100/125

LORO-X eccentric transition pipe DN 100/125

Описание

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125

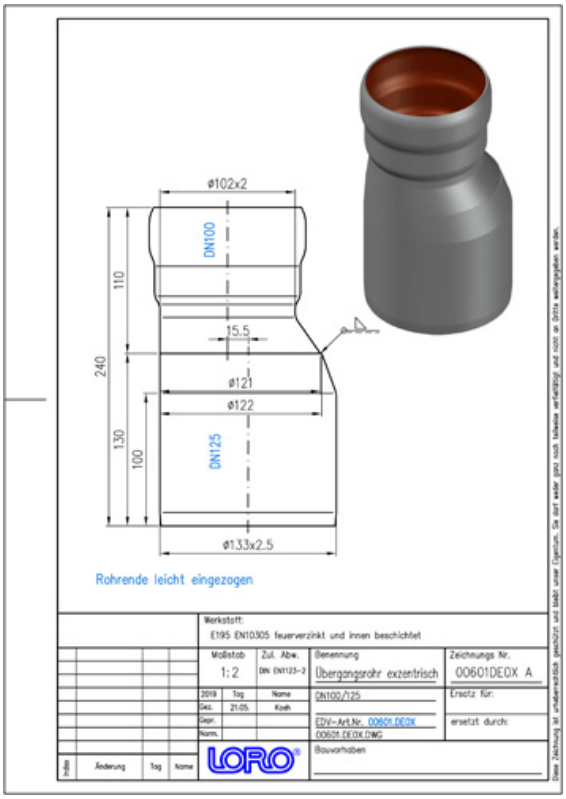

Данни за артикула

EAN код	**4038088027509**
ETIM клас	**EC003024**
Номинален диаметър	**DN 100, DN 125**
Външни размери (ВхШхД)	**133 x 141 x 240 mm**
Тегло	**1,70 Kg (STK)**
Продуктова група	**1**
Митнически тарифен номер	**73089098**
Материал / Цвят	**Stahl feuerverzinkt, Silber**

Забележка за употреба

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagerecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzenrisch "nach unten" erfolgen.

Изтегляния

Alles online

Инструкция за монтаж (PDF)
Сертификат (PDF)
BIM 3D (STEP)
CAD чертеж (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Брошура (PDF)
CAD 3D (DWG)
BIM Revit (RFA)