

LORO-X TRANSITION PIPE ECCENTRIC

DN 100/125

LORO-X eccentric transition pipe DN 100/125

Descrizione

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Dati articolo

Codice EAN	4038088027509
Classe ETIM	EC003024
Diametro nominale	DN 100, DN 125
Misure esterne (AxLxP)	133 x 141 x 240 mm
Peso	1,70 Kg (STK)
Gruppo prodotti	1
Numero tariffa doganale	73089098
Materiale / Colore	Stahl feuerverzinkt, Silber

Note d'uso

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

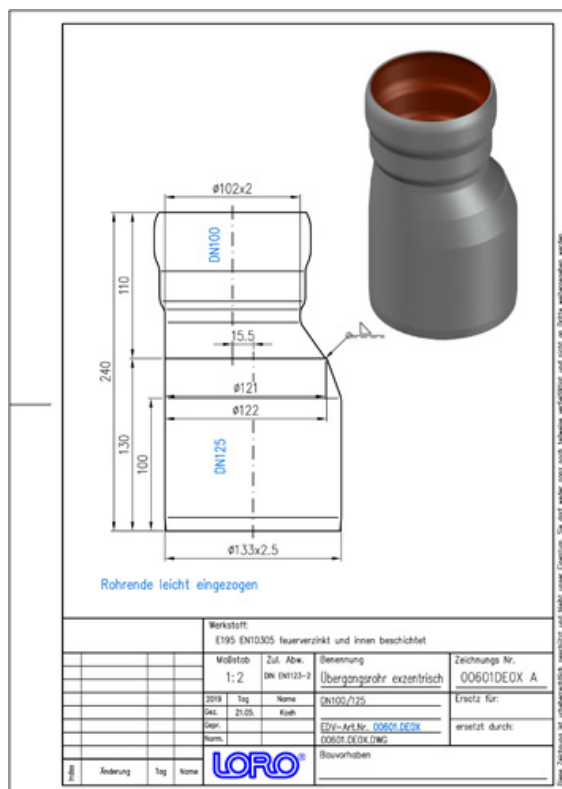

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

BIM 3D (STEP)

[Disegno dimensionale \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)