

LORO-ATTIKA NOT-ABL.M.HALBRUNDER HAUBE,

LORO-Attika emergency drain with semi-circular cover Clamping flange for PVC foil for free-standing installation

Κείμενο προδιαγραφών

LORO-X direct parapet drain, series 43 without penetration into the roof, for main drainage with gravity flow, discharge rate 3.1 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, for plastic roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m ventilated downpipe according to system data sheet LX1889, made of stainless steel, DN100

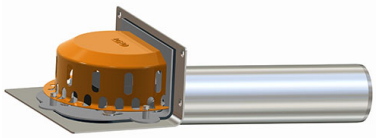

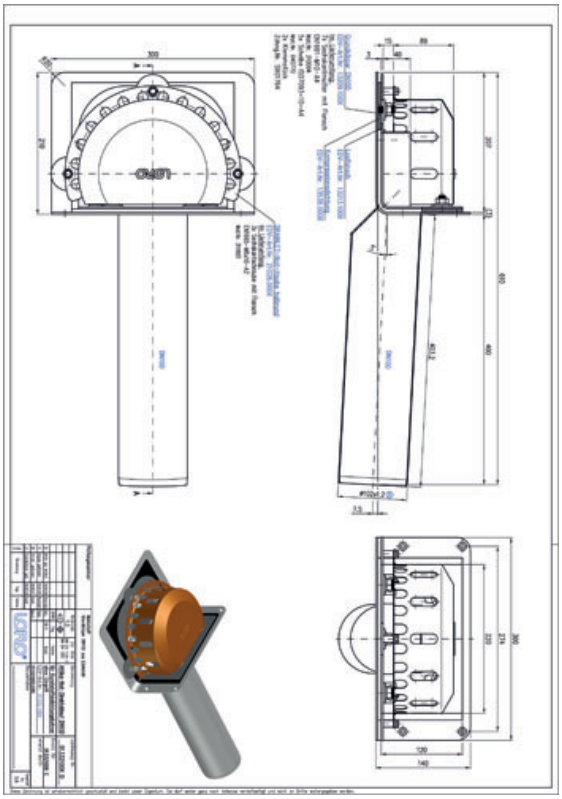

Στοιχεία προϊόντος

Κωδικός EAN	**4038088100486**
Κατηγορία ETIM	**EC010400**
Ονομαστική διάμετρος	**DN 100**
Εξωτερικές διαστάσεις (ΥxΠxΜ)	**195 x 613 x 300 mm**
Βάρος	**5,60 Kg (STK)**
Ομάδα προϊόντων	**9**
Δασμολογικός αριθμός	**73072980**
Υλικό / Χρώμα	**Edelstahl, Silber**

Σημείωση χρήσης

kein Verwendungshinweis notwendig

Λήψεις

Alles online

Σχέδιο διαστάσεων (PDF)
CAD 2D (DXF)
BIM 3D (IFC)

Έγκριση (PDF)
CAD 3D (DWG)

Φύλλο δεδομένων συστήματος LX 1889
BIM 3D (STEP)