

**LORO-X DRAINJET SCUPPER DRAIN, SIPHONIC FLOW, SERIES 62, WITHOUT
ROOF PENETRATION,WITH CLAMPING FLANGE FOR PLASTIC ROOFING**

LORO-DRAINJET Attic drain with clamping flange for plastic Series 62 DN 70

Opis

LORO-X DRAINJET siphonic parapet drain, series 62 without penetration into the roof, for main drainage with siphonic flow, discharge rate 16.0 l/s at 55 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 90-degree upstand for plastic roofing sheets, roof penetration depth 0 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2m non-ventilated downpipe according to system data sheet LX636, made of stainless steel, DN70




Dane artykułu

Kod EAN	4038088066126
Klasa ETIM	EC010400
Średnica nominalna	DN 70
Wymiary zewnętrzne (WxSxD)	270 x 869 x 188 mm
Waga	8,10 Kg (STK)
Grupa produktów	9
Numer taryfy celnej	73072980
Materiał / Kolor	Edelstahl, Silber

Wskazówki dotyczące użytkowania

LORO-DRAINJET® Attika-Schnellabläufe-ohne Eingriff
ins Dach, DN 50 und DN 70, für Kunststoff-
Dachabdichtungsbahnen

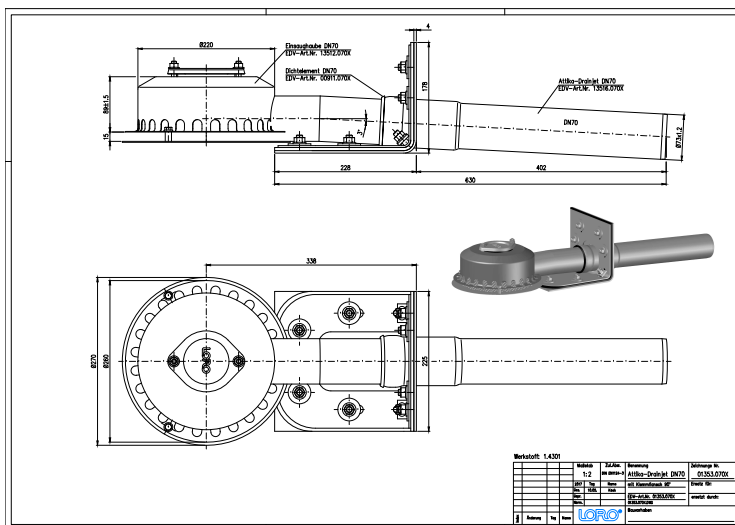

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

CAD 3D (DWG)

[Rysunek wymiarowy \(PDF\)](#)

Karta danych systemu LX 636

BIM 3D (STEP)

[Broszura \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)