


LORO-X RAINSTAR SCUPPER EMERGENCY DRAIN, SIPHONIC FLOW, WITH CLAMPING FLANGE, WITH CUT-OUT DEPTH OF 50 MM FOR BITUMINOUS

LORO-RAINSTAR Attika Emergency Drain Stainless Steel 55mm Installation Depth Clamping Flange for Bitumen Pressure Pipe DN100

Opis

LORO-X RAINSTAR siphonic parapet drain, series 89 with low penetration depth, for emergency drainage with siphonic flow, discharge rate 23.0 l/s at 75 mm water level on the roof, with clamping flange, as loose and fixed flange construction, 45-degree upstand for bituminous roofing sheets, roof penetration depth 55 mm, with DRAINJET hood made of stainless steel, according to DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX666, made of stainless steel, DN100

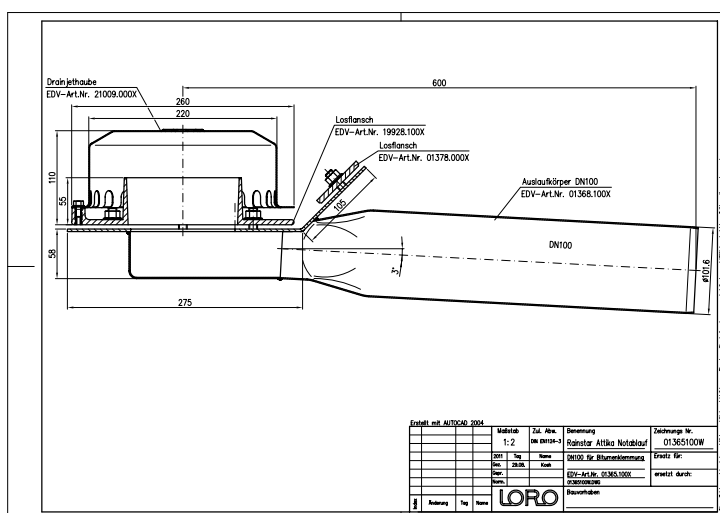

Podatki o izdelku

EAN koda	4038088074794
ETIM razred	EC010400
Nazivni premer	DN 100
Zunanje mere (VxŠxD)	270 x 738 x 215 mm
Teža	6,00 Kg (STK)
Skupina izdelkov	9
Carinska tarifna številka	73072980
Material / Barva	Edelstahl, Silber

Opomba za uporabo

LORO-X Rainstar® Attikaentwässerungssysteme mit geringer Eingrifftiefe von nur 55mm und vorgefertigter Attika-Aufkantung mit Klemm- oder Klebeflansch. Die Aufkantung der Rainstar Attikaentwässerungssysteme bietet als Montagehilfe in der Attika zusätzlichen Halt und verkürzt die Montagezeit. Abgedichtet wird der LORO-X Rainstar jedoch nur auf der horizontalen Ebene, sodass eine Abdichtung in der Aufkantung nicht notwendig ist. Die LORO-X RAINSTAR® Systeme gibt es auch als Serie 79 mit höher Freispiegel-Abflussleistung durch patentiertes, tiefergelegtes Rohr! Vorteile: -nur eine horizontale Abdichtungsebene -Aufkantung als Montagehilfe in der Attika -bis 21,7 l/s als Notentwässerung mit Druckströmung bei 75mm -geringe Eingrifftiefe von nur 55mm (Serie 89)

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[CAD \(DWG\)](#)

[Merska risba \(PDF\)](#)

[Podatkovni list sistema LX 666](#)

[BIM Revit \(RFA\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)