


LORO-X BALKONE-GRUNDEINH. 300 MM

LORO-X balcony basic unit 300 mm

Opis

LORO-balcony drainage unit, according to DIN EN 1253, with raised quality standard, made of steel, hot-dip galvanized , long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, downpipe length 300 mm, with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), as single part without accessories, DN50

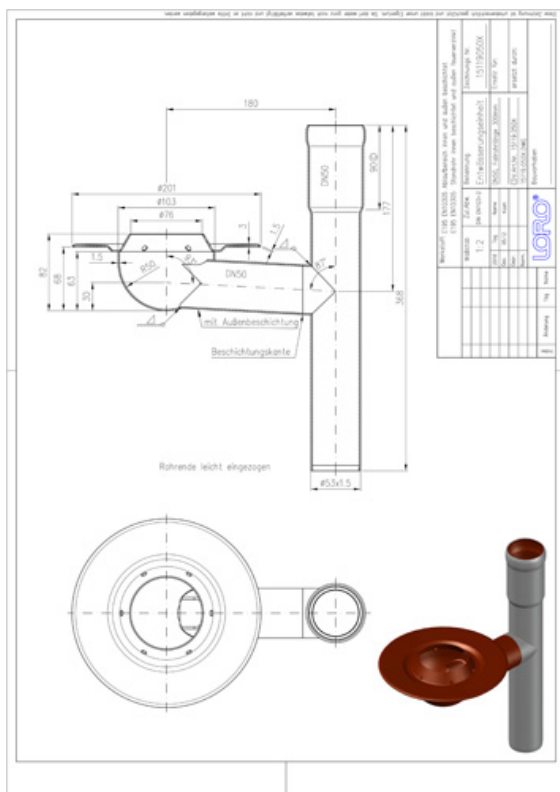

Dane artykułu

Kod EAN	4038088054727
Klasa ETIM	EC011398
Średnica nominalna	DN 50
Długość/stożek nominalny	300
Wymiary zewnętrzne (WxSxD)	201 x 312 x 368 mm
Waga	1,60 Kg (STK)
Grupa produktów	4
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenem Fallrohr mit Langmuffe zum Anschluss der Falleitung zwischen den Balkongeschossen. Balkonentwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkonentwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

Pobieranie



Alles online

[Rysunek wymiarowy \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Broszura \(PDF\)](#)

CAD 3D (DWG)

[Certyfikat \(PDF\)](#)

BIM 3D (STEP)