


LORO-X BALKONE-GRUNDEINH. 300 MM

LORO-X balcony basic unit 300 mm

Popis

LORO-balcony drainage unit, according to DIN EN 1253, with raised quality standard, made of steel, hot-dip galvanized , long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, downpipe length 300 mm, with drain pot DN50 with clamping ring (clamping ring width 35 mm circumferential), as single part without accessories, DN70

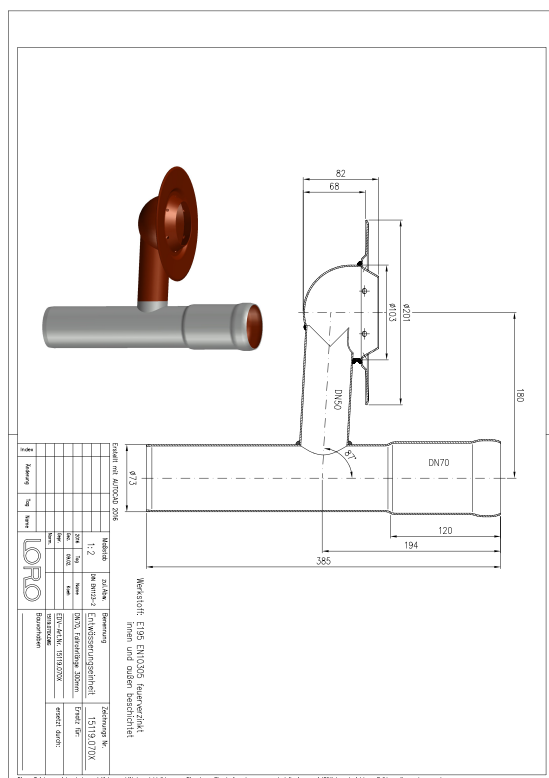

Údaje o artikli

EAN kód	4038088054734
ETIM trieda	EC011398
Menovitý priemer	DN 70
Menovitá dĺžka/stupeň	300
Vonkajšie rozmery (VxŠxH)	201 x 323 x 385 mm
Hmotnosť	2,20 Kg (STK)
Skupina produktov	4
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Serie BE beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb und angeschlossenem Fallrohr mit Langmuffe zum Anschluss der Falleitung zwischen den Balkongeschossen. Balkonentwässerungseinheiten Serie BE (bestehend aus Fallrohrteil und Ablauf) und Balkonentwässerungsabzweige besitzen Langmuffen zum Toleranzausgleich von +/- 30 mm. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertigestrich oder Fliesenbelag im Mörtelbett.

Na stiahnutie



Alles online

[Rozmerový výkres \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

[Certifikát \(PDF\)](#)

BIM 3D (STEP)