

LORO-X SINGLE DRAIN TYPE A, STRAIGHT RUN-OFF

LORO-X single drain with vertical rim DN 50

Opis

LORO-X balcony drain, series A with supporting edge, one-piece, without thermal insulation, vertical outlet, according to DIN EN 1253 with raised quality standard, made of steel, hot-dip galvanized, with long-life coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, consisting of: consisting of drain pot (clamping ring width 35 mm circumferential), sealing element, plastic strainer 82 x 82 mm (for installation height approx. 30 +/- 5 mm), DN50




Podaci o artiklu

EAN kod	4038088008577
ETIM klasa	EC011398
Nazivni promjer	DN 50
Vanjske mjere (VxŠxD)	201 x 201 x 275 mm
Težina	1,10 Kg (STK)
Grupa proizvoda	4
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Serie A beinhaltet Einzelabläufe mit Stützrand aus Stahl mit Endsieb, beinhaltet Einzelabläufe mit Stützrand aus Stahl mit höhenverstellbarer Siebaufnahme und Endsieb aus Edelstahl. Beide Serien weisen Öffnungen für Sickerwasser oberhalb des Stützrandes auf, sodass Restwasserbildung vermieden wird. Einsatzgebiete Balkone ohne Abdichtungsbahnen mit Gussasphalt, Fertiggestrich oder Fliesenbelag im Mörtelbett.

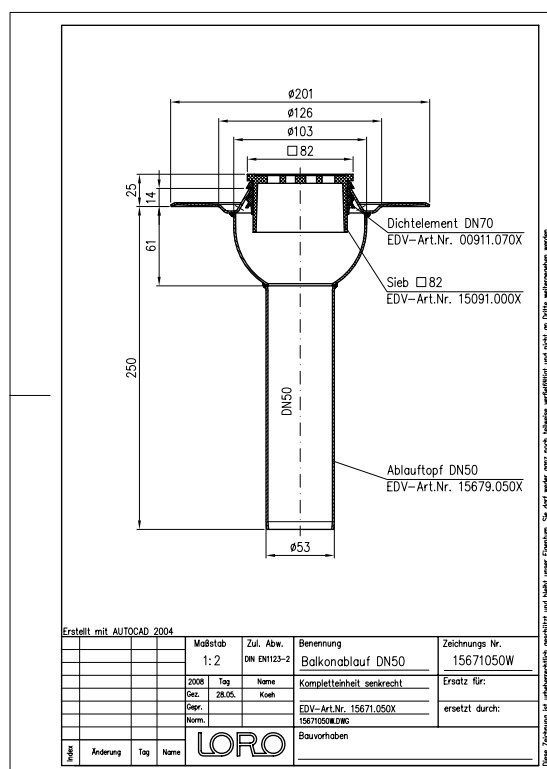

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

Certifikat (PDF)

CAD 2D (DXF)

[Dimenzijski crtež \(PDF\)](#)

[Aufbauschema \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

Tehnički list sustava LX 919