LORO-X PIPE WITH 2 SOCKET 3000 MM DN 80

LORO-X pipe 2 joints 3000 mm DN 80

Description

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm with 2sockets, DN 80

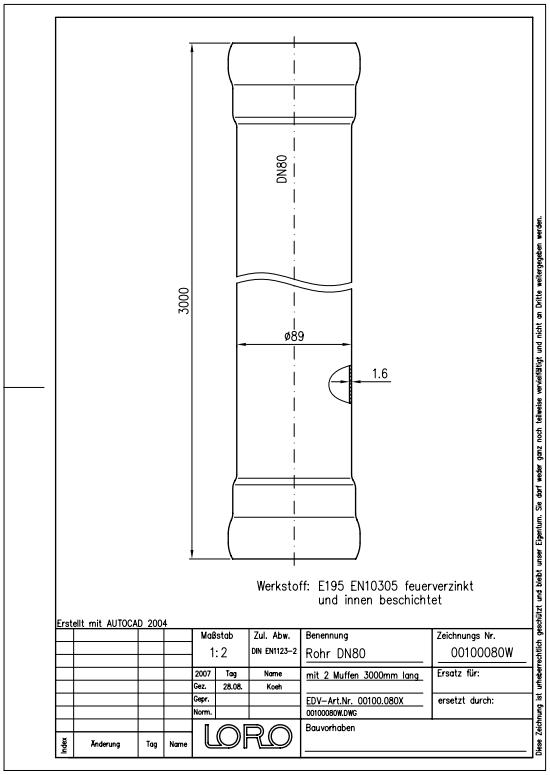

Données de l'article

Code EAN	**4038088037751**
Classe ETIM	**EC011386**
Diamètre nominal	**DN 80**
Longueur/degré nominal	**3000**
Dimensions extérieures (HxLxP)	**102 x 102 x 3000 mm**
Poids	**11,70 Kg (STK)**
Groupe de produits	**1**
Numéro tarifaire douanier	**73063012**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

LORO-X Stahlabflussrohre mit 2 Muffen werden hauptsächlich für die bauseitige Erstellung von Passstücken verwendet und eignen sich daher auch gut für Lagerhaltung.Wird das Rohr mit 2 Muffen an der benötigten Länge getrennt, so kann die andere Seite ebenfalls als Rohr mit 1 Muffe verwendet werden. Verschnitt wird so minimiert.

Téléchargements

Alles online

- Notice d'installation (PDF)
- Certificat (PDF)
- BIM IFC4 (parametrisch)
- Dessin dimensionnel (PDF)
- CAD 2D (DXF)
- Brochure (PDF)
- CAD (DWG)