

LORO-X PIPE WITH 2 SOCKET 3000 MM DN 100

LORO-X pipe 2 sockets 3000 mm DN 100

Beschrijving

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm with 2sockets, DN100




Artikelgegevens

EAN-code	4038088004678
ETIM Klasse	EC011386
Nominale diameter	DN 100
Nominale lengte/graad	3000
Buitenafmetingen (HxBxL)	118 x 118 x 3000 mm
Gewicht	16,30 Kg (STK)
Productgroep	1
Douanetariefnumme	73063012
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

LORO-X Stahlabflussrohre mit 2 Muffen werden hauptsächlich für die bauseitige Erstellung von Passstücken verwendet und eignen sich daher auch gut für Lagerhaltung. Wird das Rohr mit 2 Muffen an der benötigten Länge getrennt, so kann die andere Seite ebenfalls als Rohr mit 1 Muffe verwendet werden. Verschnitt wird so minimiert.

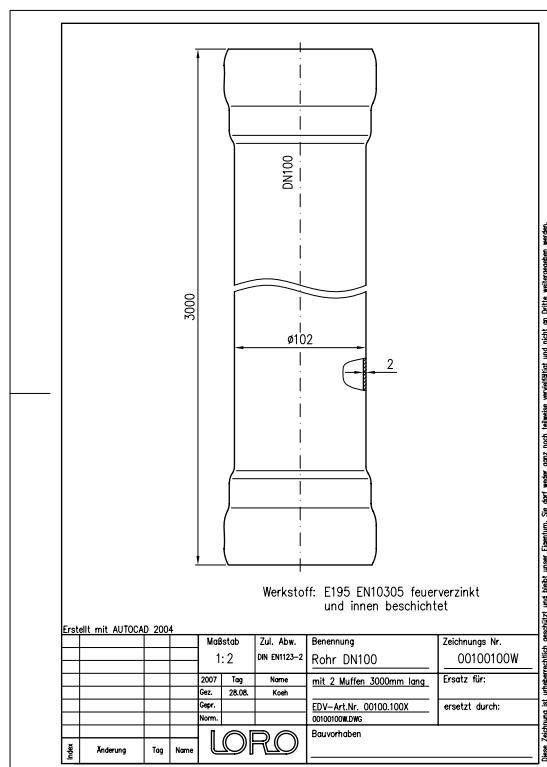

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Brochure \(PDF\)](#)

[CAD \(DWG\)](#)