

LORO-X PIPE WITH 2 SOCKET 2000 MM DN 50

LORO-X pipe 2 joints 2000 mm DN 50

Descrizione

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2000 mm with 2sockets, DN50




Dati articolo

Codice EAN	4038088005392
Classe ETIM	EC011386
Diametro nominale	DN 50
Lunghezza/grado nominale	2000
Misure esterne (AxLxP)	63 x 63 x 2000 mm
Peso	4,20 Kg (STK)
Gruppo prodotti	1
Numero tariffa doganale	73063012
Materiale / Colore	Stahl feuerverzinkt, Silber

Note d'uso

LORO-X Stahlabflussrohr mit 2 Muffen werden hauptsächlich für die bauseitige Erstellung von Passstücken verwendet und eignen sich daher auch gut für Lagerhaltung. Wird das Rohr mit 2 Muffen an der benötigten Länge getrennt, so kann die andere Seite ebenfalls als Rohr mit 1 Muffe verwendet werden. Verschnitt wird so minimiert.

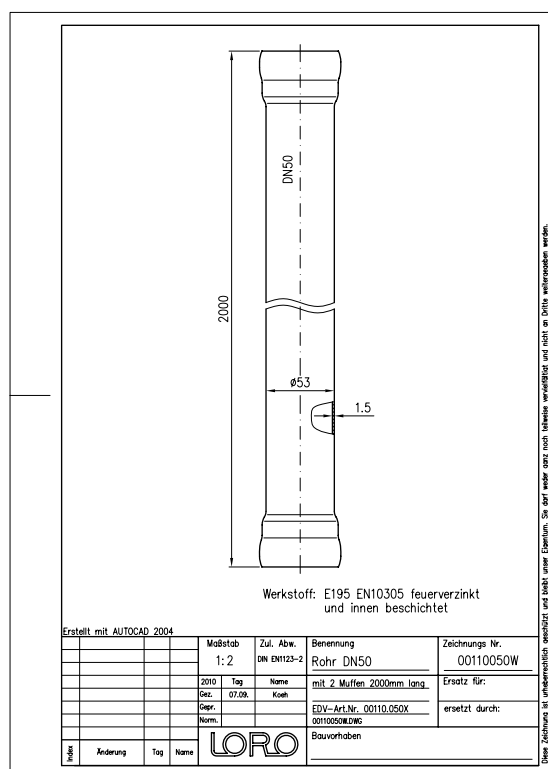

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)
[Certificato \(PDF\)](#)
[BIM IFC4 \(parametrico\)](#)

[Disegno dimensionale \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Brochure \(PDF\)](#)
[CAD \(DWG\)](#)