

LORO-X PIPE WITH 2 SOCKET 2000 MM DN 50

LORO-X pipe 2 joints 2000 mm DN 50

Beskrivelse

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2000 mm with 2sockets, DN50




Artikkeldata

EAN-kode	4038088005392
ETIM-klasse	EC011386
Nominell diameter	DN 50
Nominell lengde/grad	2000
Utvendige mål (HxBxL)	63 x 63 x 2000 mm
Vekt	4,20 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

LORO-X Stahlabflussrohre mit 2 Muffen werden hauptsächlich für die bauseitige Erstellung von Passstücken verwendet und eignen sich daher auch gut für Lagerhaltung. Wird das Rohr mit 2 Muffen an der benötigten Länge getrennt, so kann die andere Seite ebenfalls als Rohr mit 1 Muffe verwendet werden. Verschnitt wird so minimiert.

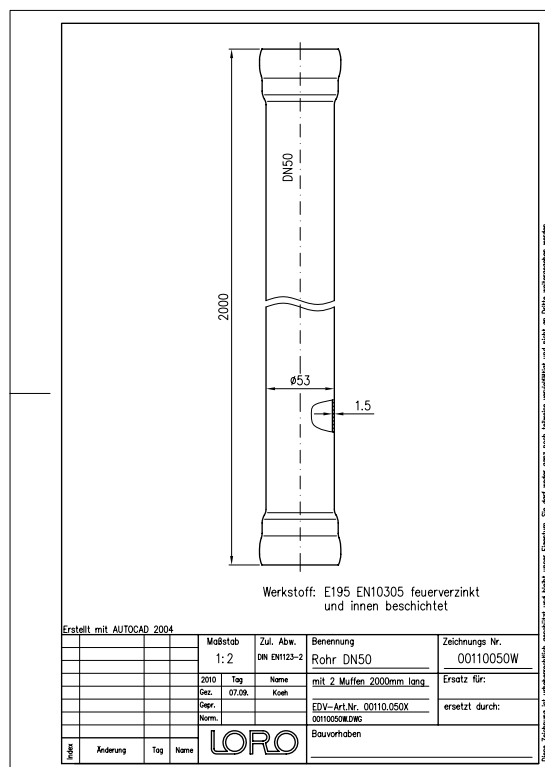

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Brosjyre \(PDF\)](#)
[CAD \(DWG\)](#)