

LORO-X DOUBLE SOCKET DN 50

LORO-X double socket DN 50

Beskrivning

LORO-X double socket, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50




Artikeldata

EAN-kod	4038088024317
ETIM-klass	EC003024
Nominell diameter	DN 50
Ytermått (HxBxL)	63 x 63 x 94 mm
Vikt	0,20 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Sollte nach dem Ablängen ein Rohrstück ohne Muffe anfallen, so kann es durch die LORO-X Doppelmuffe wieder zu einem Muffenrohr ergänzt werden. Die Doppelmuffe sollte auf das Restrohr mit dem LORO-X Dichtelement und dem LORO-X Kleber aufgebracht werden. (In frostgefährdeten Bereichen sind gegen die Fließrichtung gerichtete Muffen, auch Doppelmuffen, nicht zulässig)

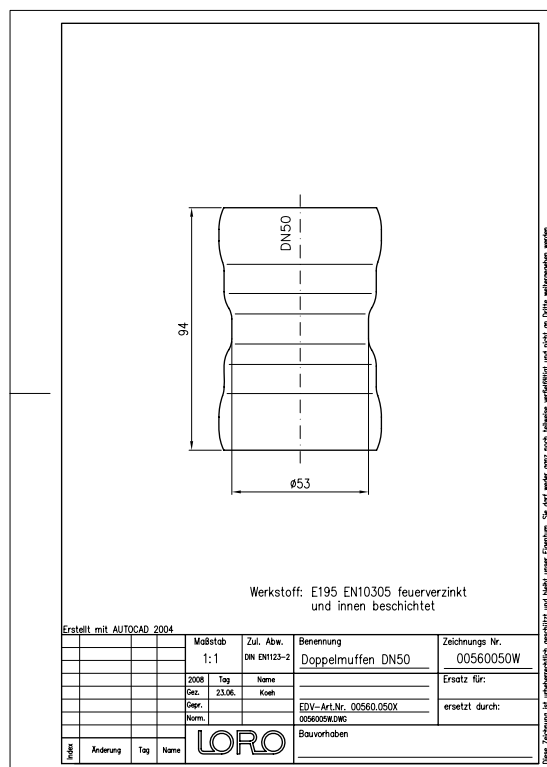

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Broschyr \(PDF\)](#)
[CAD \(DWG\)](#)