

LORO-X TRANSITION PIPE ECCENTRIC

DN 70/125

LORO-X eccentric transition pipe DN 70/125

Beskrivning

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN70/125




Artikeldata

EAN-kod	4038088027493
ETIM-klass	EC003024
Nominell diameter	DN 70, DN 125
Ytermått (HxBxL)	133 x 139 x 200 mm
Vikt	1,60 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

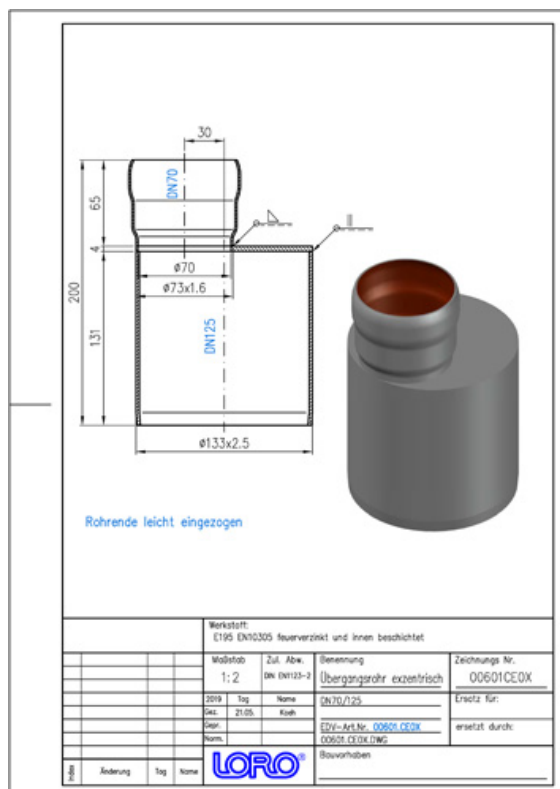

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Broschyr \(PDF\)](#)
[CAD 3D \(DWG\)](#)