

LORO-X TRANSITION PIPE ECCENTRIC

DN 70/125

LORO-X eccentric transition pipe DN 70/125

Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN70/125




Dane artykułu

Kod EAN	4038088027493
Klasa ETIM	EC003024
Średnica nominalna	DN 70, DN 125
Wymiary zewnętrzne (WxSxD)	133 x 139 x 200 mm
Waga	1,60 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

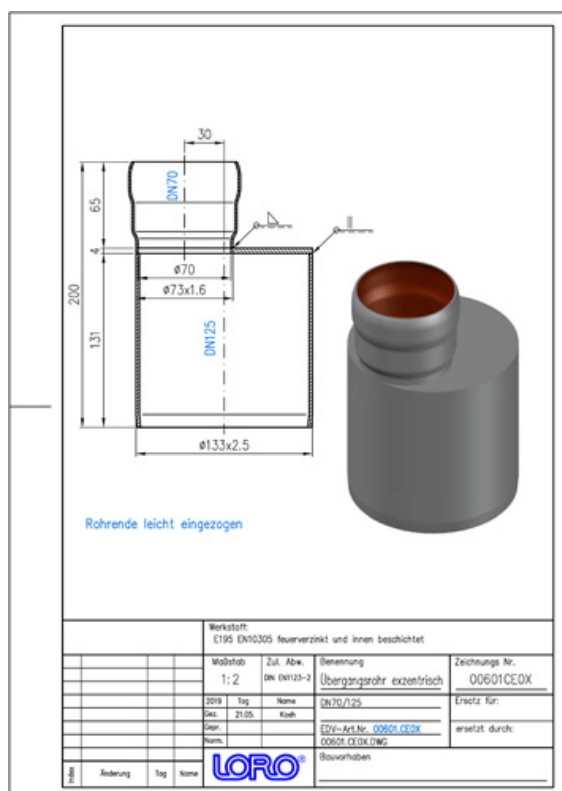

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)