

LORO-X TRANSITION PIPE ECCENTRIC

DN 100/125

LORO-X eccentric transition pipe DN 100/125

Περιγραφή

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Στοιχεία προϊόντος

Κωδικός EAN	4038088027509
Κατηγορία ETIM	EC003024
Ονομαστική διάμετρος	DN 100, DN 125
Εξωτερικές διαστάσεις (ΥxΠxΜ)	133 x 141 x 240 mm
Βάρος	1,70 Kg (STK)
Ομάδα προϊόντων	1
Δασμολογικός αριθμός	73089098
Υλικό / Χρώμα	Stahl feuerverzinkt, Silber

Σημείωση χρήσης

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

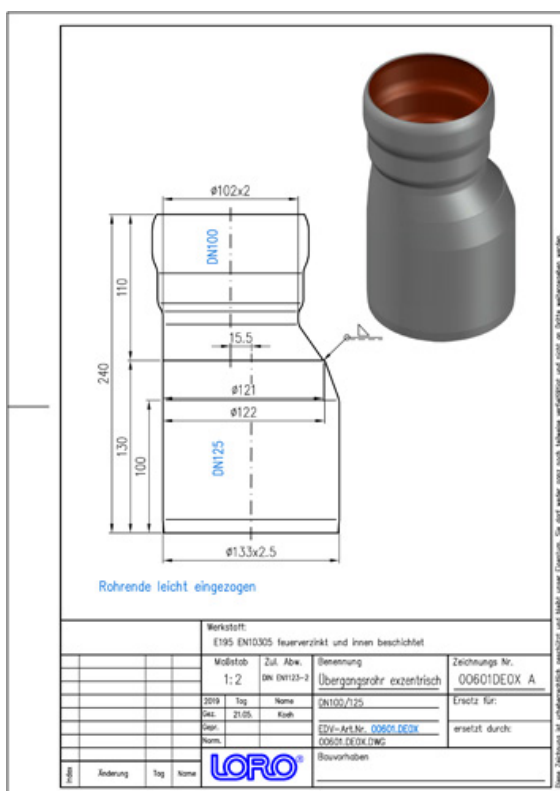

Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)

[Έγκριση \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Φυλλάδιο \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)