

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Описание

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Данни за артикула

EAN код	4038088027523
ETIM клас	EC003024
Номинален диаметър	DN 125, DN 150
Външни размери (ВxШxД)	159 x 169 x 252 mm
Тегло	2,40 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забелешка за употреба

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

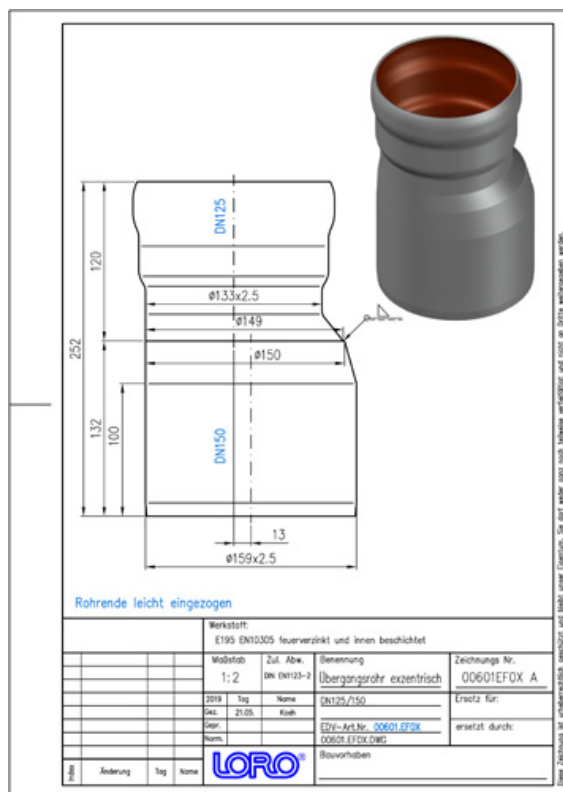

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

Сертификат (PDF)

BIM 3D (STEP)

[CAD чертеж \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Брошура \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)