

LORO-X TRANSITION PIPE ECCENTRIC

DN 150/200

LORO-X eccentric transition pipe DN 150/200

Description

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN150/200




Article information

EAN Code	4038088027530
ETIM Class	EC003024
Nominal diameter	DN 150, DN 200
Outside measurements (HxWxL)	219 x 230 x 282 mm
Weight	4,40 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

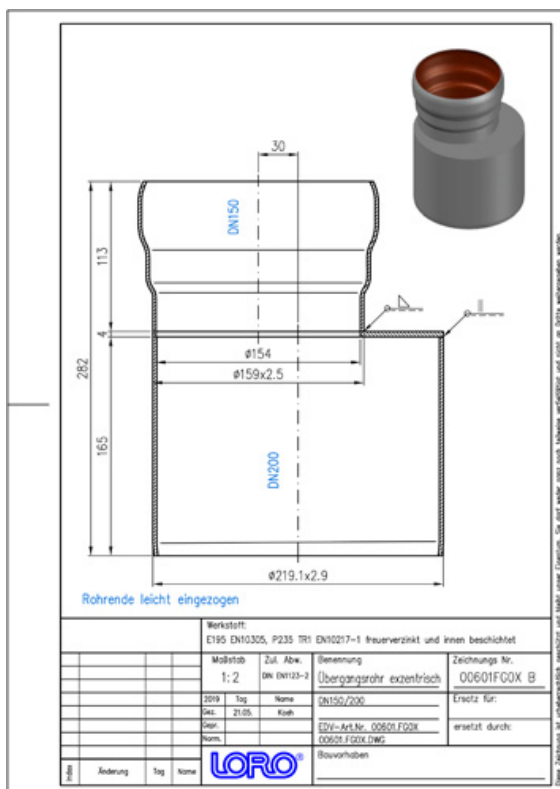

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD drawing \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)