

LORO-X SLIP IN SOCKET WITH LONG SOCKET DN 40

LORO-X push-in sleeve DN 40

Opis

LORO-X slip-in socket made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN40




Dane artykułu

Kod EAN	4038088029060
Klasa ETIM	EC003024
Średnica nominalna	DN 40
Wymiary zewnętrzne (WxSxD)	51 x 51 x 120 mm
Waga	0,20 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Für die Rohrmontage zwischen 2 Fixpunkten bietet die Langmuffe eine größere Einschubtiefe als Längenausgleich. Sie ersetzt keinen dauerhaften Kompensator für die Längenausdehnung, da Gleitmittel und Dichtelement nach kurzer Zeit eine feste Verbindung herstellen.

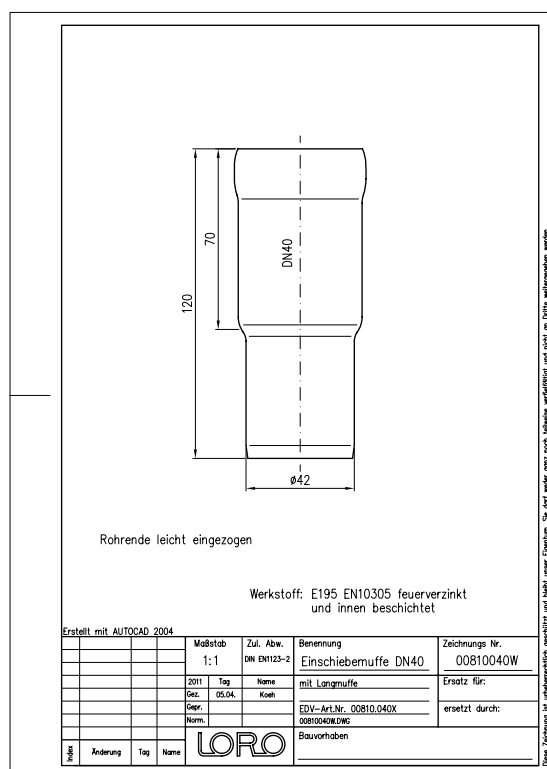

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broszura \(PDF\)](#)

[CAD \(DWG\)](#)