

LORO-X SLIP IN SOCKET WITH LONG SOCKET DN 100

LORO-X push-in sleeve DN 100

Description

LORO-X slip-in socket made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100




Données de l'article

Code EAN	4038088029121
Classe ETIM	EC003024
Diamètre nominal	DN 100
Dimensions extérieures (HxLxP)	118 x 118 x 240 mm
Poids	1,30 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

Für die Rohrmontage zwischen 2 Fixpunkten bietet die Langmuffe eine größere Einschubtiefe als Längenausgleich. Sie ersetzt keinen dauerhaften Kompensator für die Längenausdehnung, da Gleitmittel und Dichtelement nach kurzer Zeit eine feste Verbindung herstellen.

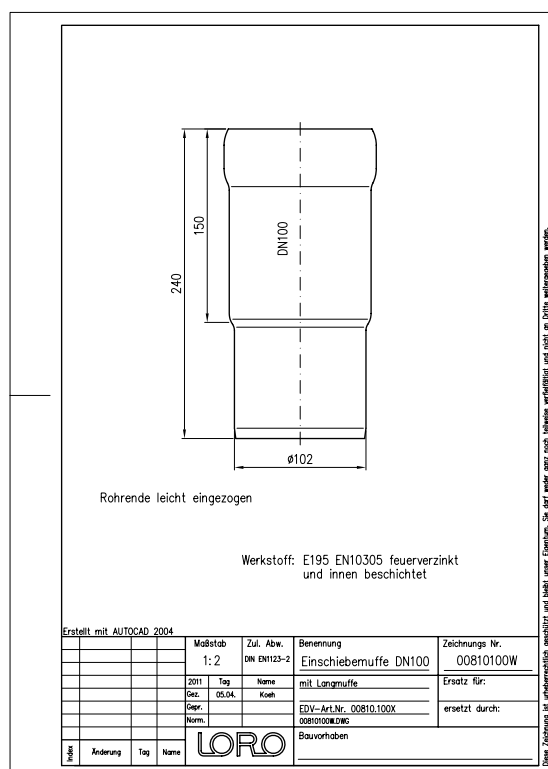

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)