

LORO-X SLIP IN SOCKET WITH LONG SOCKET DN 125

LORO-X push-in sleeve DN 125

Popis

LORO-X slip-in socket made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125




Údaje o artiklu

EAN kód	4038088029138
ETIM třída	EC003024
Jmenovitý průměr	DN 125
Vnější rozměry (VxŠxD)	152 x 152 x 260 mm
Hmotnost	2,30 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Für die Rohrmontage zwischen 2 Fixpunkten bietet die Langmuffe eine größere Einschubtiefe als Längenausgleich. Sie ersetzt keinen dauerhaften Kompensator für die Längenausdehnung, da Gleitmittel und Dichtelement nach kurzer Zeit eine feste Verbindung herstellen.

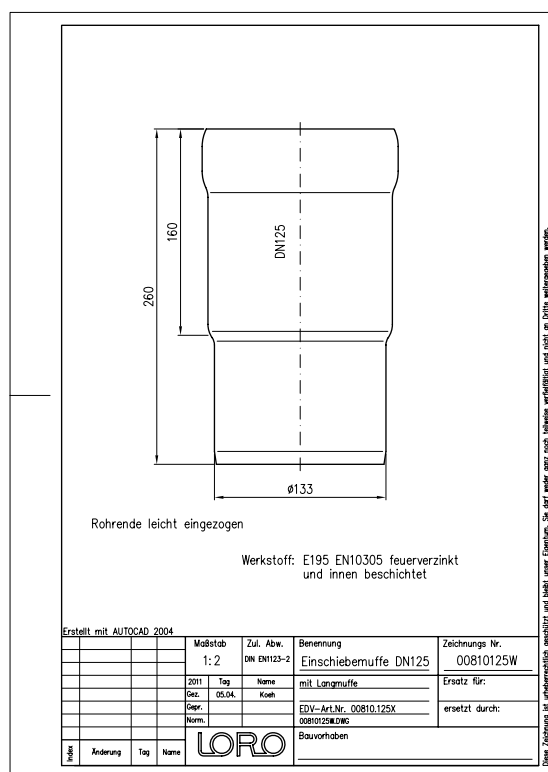

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[Certifikát \(PDF\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)