

LORO-X SLIP IN SOCKET WITH LONG SOCKET DN 150

LORO-X push-in sleeve DN 150

Popis

LORO-X slip-in socket made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN150




Údaje o artikli

EAN kód	4038088029145
ETIM trieda	EC003024
Menovitý priemer	DN 150
Vonkajšie rozmery (VxŠxH)	181 x 181 x 285 mm
Hmotnosť	2,90 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Für die Rohrmontage zwischen 2 Fixpunkten bietet die Langmuffe eine größere Einschubtiefe als Längenausgleich. Sie ersetzt keinen dauerhaften Kompensator für die Längenausdehnung, da Gleitmittel und Dichtelement nach kurzer Zeit eine feste Verbindung herstellen.

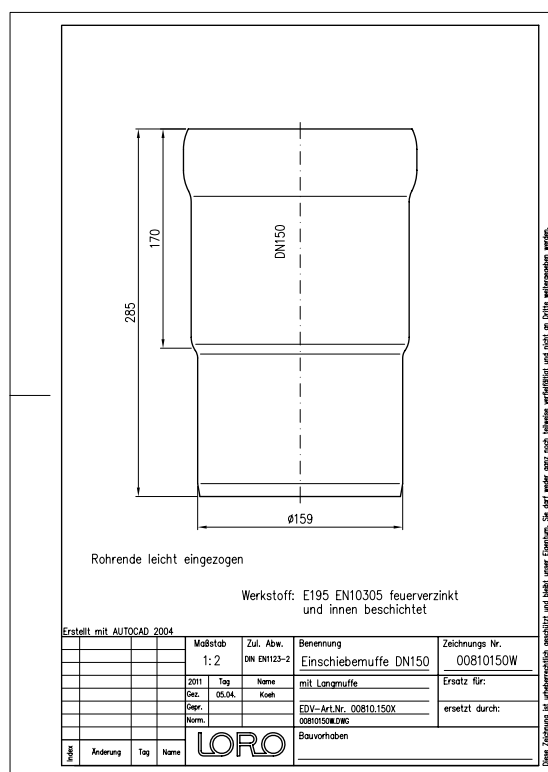

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Prospekt \(PDF\)](#)

[CAD \(DWG\)](#)