LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

Beskrivning

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100

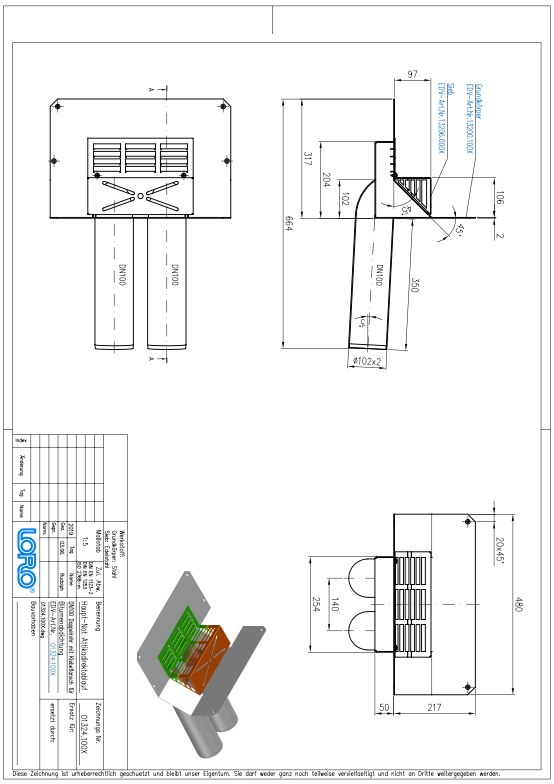

Artikeldata

EAN-kod	4038088090770
ETIM-klass	EC010400
Nominell diameter	DN 100
Yttermått (HxBxL)	480 x 719 x 338 mm
Vikt	10,70 Kg (STK)
Produktgrupp	9
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freispiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

Nedladdningar

Alles online

Monteringsanvisning (PDF)
Godkännande (PDF)
CAD 3D (DWG)
Måttritning (PDF)
Systemdatablad LX 727
BIM 3D (STEP)
Broschyr (PDF)
CAD 2D (DXF)
BIM 3D (IFC)