


LORO-DOPPELR.ATT.ABL.HAUPT-NOT-KOMBI M.B

LORO double pipe parapet drain main-emergency-combi with basin low-laid pipe with adhesive flange for bitumen DN 100

Popis

LORO-X main-emergency combination direct parapet drain with double pipe, series 43 with basin and lowered pipe, with gravity flow, discharge rate main drainage 4.0 l/s at 35 mm water level on the roof and emergency drainage 4.0 l/s at 75 mm, with bonding flange, for bituminous roofing sheets, roof penetration depth 103 mm, in accordance with DIN EN 1253, proof of performance with standard-compliant testing system with 4.2 m non-ventilated downpipe according to system data sheet LX727, made of steel, hot-dip galvanized, DN100/100




Údaje o artikli

EAN kód	4038088090770
ETIM trieda	EC010400
Menovitý priemer	DN 100
Vonkajšie rozmery (VxŠxH)	480 x 719 x 338 mm
Hmotnosť	10,70 Kg (STK)
Skupina produktov	9
Colný sadzovník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Für Wohngebäude bietet LORO ein Silent System mit Haupt- und Notentwässerung als Silent-Freispiegelströmung. Die Hauptentwässerung erfolgt hierbei ebenfalls mit 4,5l/s in die Grundleitung - die Notentwässerung läuft als Speierlösung jedoch direkt über das Überlaufwehr des Sammelkastens.

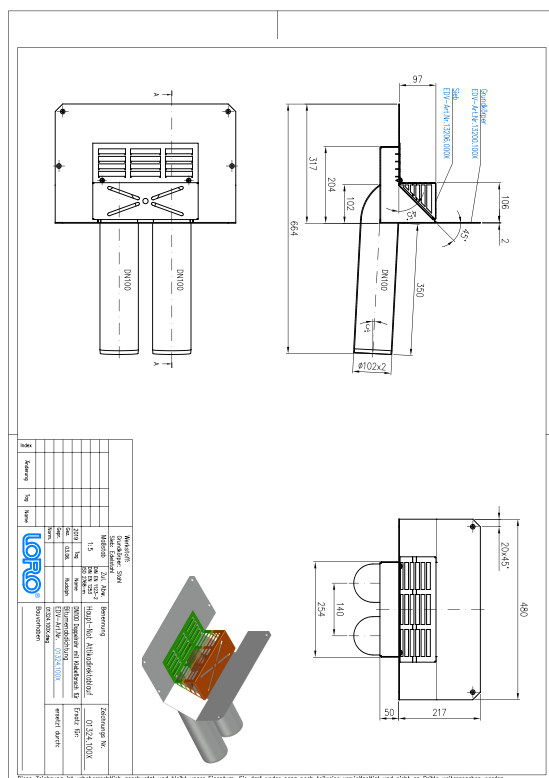

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

CAD 3D (DWG)

[Rozmerový výkres \(PDF\)](#)

Systémový dátový list LX 727

BIM 3D (STEP)

[Prospekt \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)